
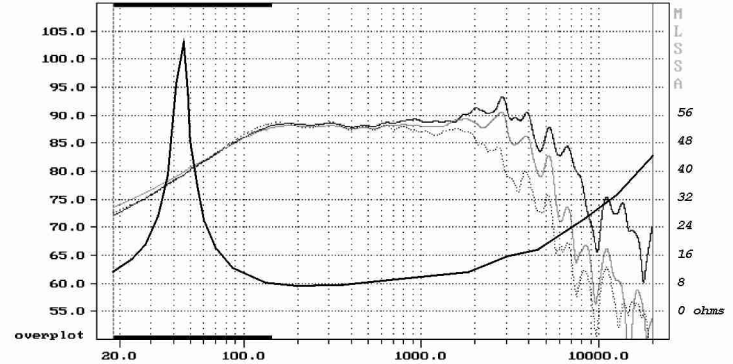


**6" Bass HDA cone 8 ohms**

**AM170Z2**

Non resonant die cast chassis  
High loss rubber surround  
High temperature voice coil

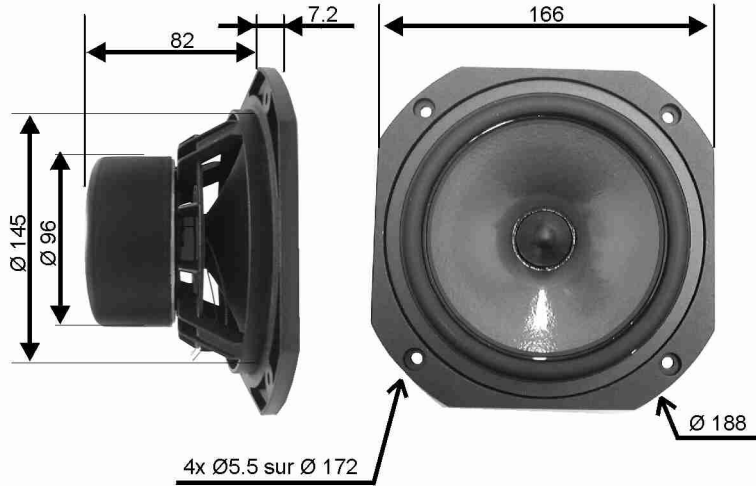

Nominal impedance . . . . . 8 ohms  
Resonance . . . . . 41.79 Hz  
Power handling (IEC) . . . . . 60 W  
Sensitivity (2.83V/1m) . . . . . 89.2 dB

Resistance (DC) . . . . . 6.21 ohms  
Inductance . . . . . 0.78 mH  
Xmax . . . . . ± 3.25 mm  
Qms . . . . . 4.01  
Qes . . . . . 0.40  
Qts . . . . . 0.37  
Vas . . . . . 30.07 l

Voice coil diam. . . . . 30 mm  
Voice coil length . . . . . 12.5 mm  
Former . . . . . kapton  
Layer(s) . . . . . 1  
Wire type . . . . . flat  
Force factor . . . . . 6.93 NA  
Moving mass . . . . . 11.94 gr

Cone material . . . . . HDA  
Suspension . . . . . rubber  
Chassis . . . . . die cast  
Total mass . . . . . 1.4 kg

