


Non resonant die cast chassis
High loss rubber surround
High temperature voice coil

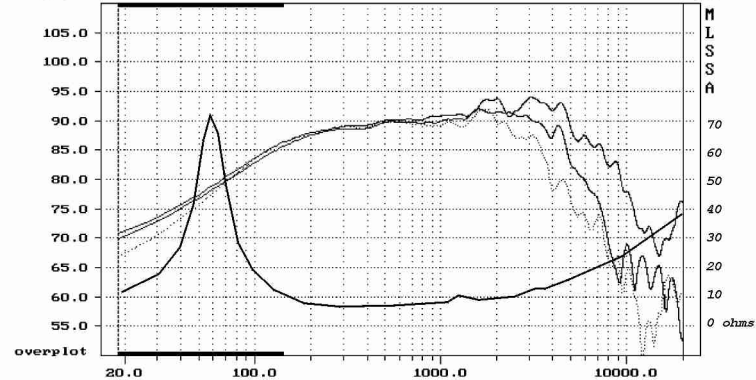

Nominal impedance 8 ohms
Resonance 63.50 Hz
Power handling (IEC) 50 W
Sensitivity (2.83V/1m) 90.2 dB

Resistance (DC) 6.20 ohms
Inductance 0.69 mH
Xmax ± 2.0 mm
Qms 2.69
Qes 0.33
Qts 0.25
Vas 8.89 l

Voice coil diam. 25 mm
Voice coil length 11.2 mm
Former kapton
Layer(s) 1
Wire type flat
Force factor 7.16 NA
Moving mass 6.89 gr

Cone material HDA
Suspension rubber
Chassis die cast
Total mass 1.1 kg

