

6 1/2" - HD-A CONE DRIVER - 170 mm

PRESTIGE SERIES


Double bobine
 HD-A (High Definition Aerogel) cone
 Non resonant die cast chassis
 Ventilated chassis under spider
 Vented pole piece with protection grill
 Edgewound, flat copper wire
 Kapton Voice Coil Former
 Gold plated terminals

Double bobine
 Cône Haute Définition Aéro-gel (HD-A)
 Châssis Zamak moulé non résonant
 Fond ventilé
 Noyau ventilé avec grille de protection
 Bobine sur support Kapton
 Fil cuivre plat sur chant
 Connectique plaquée or




HD-A represents a true breakthrough in loudspeaker cone technology, surpassing all conventional materials being used today. Through an extraordinary combination of newly developed materials and processes, Audax has created an innovative composite membrane whose properties are very close to ideal for making loudspeaker diaphragms. Ultra light, extremely rigid and maximized internal damping. This no-compromise cone is based on a totally controlled matrix of acrylic polymer gel in which an optimized proportion of Carbon and Kevlar fibers are embedded. An exclusive, proprietary process acts to perfectly align the fibers along the polymer chain. The procedure allows total control over the contour and weight of the cone, while making it possible to vary the thickness of the membrane along the profile. This 6 1/2" Bass driver was developed for top range, no-compromise high end 2 or 3-way systems. It features a die cast Zamak chassis with unobstructed venting for enhanced transient response. High power handling results from the flat, edgewound copper coil mounted onto a fiberglass reinforced Kapton voice coil former. Unequalled definition is achieved over a wide spectrum of frequencies and dynamic ranges while retaining a neutral tonal balance with precise and detailed imaging. The "suggested applications" charts indicate various driver loads, including the box alignment used to measure the response curve (Vb REF). The response curves shown on the diagram indicate the predicted low end response of the driver in the suggested box volume (Vb) with suggested port (Dp-Lp). (See p. 10)

Le cône HD-A constitue une véritable percée technologique dans ce domaine, surpassant tous les matériaux connus à ce jour. Par une extraordinaire association d'une nouvelle matière et d'un procédé original, Audax a créé une membrane composite, innovation dont les propriétés sont proches de l'idéal pour un transducteur à radiation directe. Ultra léger, extrêmement rigide et parfaitement amorti, ce cône sans compromis est constitué d'une matrice contrôlée de gel polymère acrylique enveloppant des fibres de Carbone et de Kevlar idéalement ordonnées. Un procédé exclusif Audax permet un alignement optimisé des fibres dans la chaîne du polymère. Le procédé procure un contrôle total du profil et du poids du cône, tout en offrant la possibilité de faire varier l'épaisseur à chaque endroit. Ce boomer de 170 mm est destiné à des systèmes 2 ou 3 voies de prestige. Il est équipé d'un châssis Zamak moulé à fond ventilé sous le spider afin de favoriser la meilleure réponse en transitoire. Sa bonne tenue en puissance résulte de l'utilisation d'une bobine sur support Kapton renforcé fibre de verre en fil de cuivre plat sur chant. La connectique plaquée or permet une excellente soudabilité. Le tableau "Suggested applications" indique différents types de charge dont celui utilisé pour la mesure de la courbe de réponse (Vb). Les courbes publiées correspondent à la réponse dans le grave pour un volume (Vb) et une dimension d'évent donnée (Dp-Lp). (Voir p. 10)

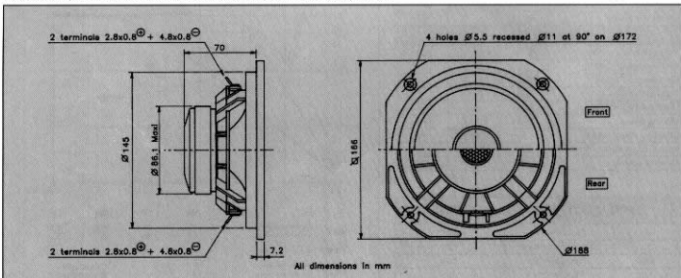

RESPONSE CURVE

refer to page 15

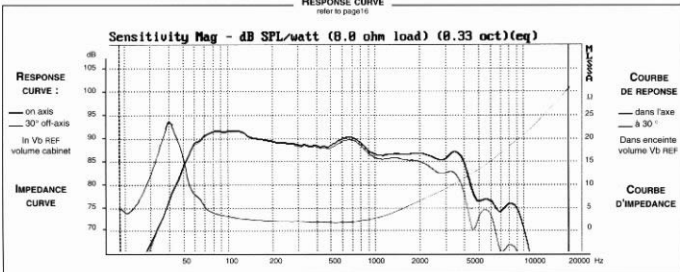
SPECIFICATIONS

| Technical Characteristics | Symbol | Value | Units |
|---------------------------|--------|-------|-------|
|---------------------------|--------|-------|-------|

PRIMARY APPLICATION

| | | | |
|------------------------|----|-------|----|
| Nominal Impedance | Z | 2 x 8 | Ω |
| Resonance Frequency | Fs | 35 | Hz |
| Nominal Power Handling | P | 60 | W |
| Sensitivity | E | 89 | dB |

VOICE COIL

| | | | |
|-----------------------|------|--------|----|
| Voice coil diameter | Ø | 30 | mm |
| Minimum Impedance | Zmin | 3,1 | Ω |
| DC Resistance | Re | 2,7 | Ω |
| Voice Coil Inductance | Lbm | 0,40 | mH |
| Voice coil Length | h | 12,5 | mm |
| Former | - | Kapton | - |
| Number of layers | n | 1 | - |

MAGNET

| | | | |
|------------------------|-------|---------|------------------|
| Magnet dimensions | Ø x h | 84 x 15 | mm |
| Magnet weight | m | 0,31 | kg |
| Flux density | B | 1 | T |
| Force factor | BL | 5,7 | NA ⁻¹ |
| Height of magnetic gap | He | 5 | mm |
| Stray flux | Fmag | - | Am ⁺ |
| Linear excursion | Xmax | ±3,75 | mm |

PARAMETERS

| | | | |
|---------------------------------|-----|-----------------------|--------------------|
| Suspension Compliance | Cms | 1.10 ⁻³ | mN ⁻¹ |
| Mechanical Q Factor | Qms | 7,6 | - |
| Electrical Q Factor | Qes | 0,37 | - |
| Total Q Factor | Qts | 0,35 | - |
| Mechanical Resistance | Rms | 0,59 | kg s ⁻¹ |
| Moving Mass | Mms | 20,9.10 ⁻¹ | kg |
| Effective Piston Area | S | 1,38.10 ¹ | m ² |
| Volume Equivalent of Air at Cas | Vas | 27,4.10 ¹ | m ³ |
| Mass of speaker | M | 1,3 | kg |


The specifications are given with voice coils connected in parallel

APPLICATION PARAMETERS


| | | |
|----|------------------|-----------------|
| Vb | Box volume | dm ³ |
| Fb | Tuning frequency | Hz |
| Dp | Port diameter | cm |
| Lp | Port length | cm |

IMPULSE RESPONSE
WATERFALL

refer to page 16

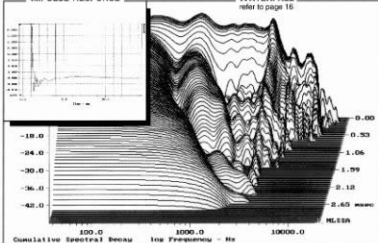
SUGGESTED APPLICATIONS

refer to page 8 to 13



| | Vb | Fb | Dp | Lp |
|---------------|----|----|-----|------|
| Vb 1 | 45 | 35 | 7,5 | 12,7 |
| | 45 | 28 | 5 | 9 |
| Vb REF | 15 | 45 | 5 | 10,8 |
| | 8 | 53 | 3,2 | 5,8 |
| Vb 2 | 8 | 40 | 3,2 | 11,5 |

Please refer to method of measurement and measurement conditions pages 15 to 19.

Audax may, without prior notification modify the specifications on its products further to research and development requirements.