


Non resonant die cast chassis
High loss rubber surround
High temperature voice coil

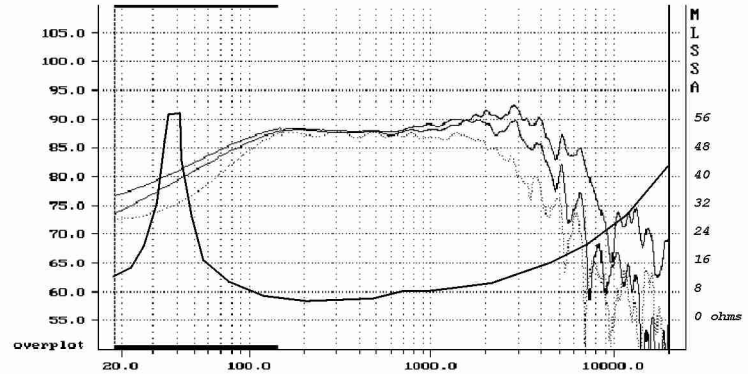

Nominal impedance . . . 8 ohms
Resonance 32.86 Hz
Power handling (IEC) 70 W
Sensitivity (2.83V/1m) 88.9 dB

Resistance (DC) 6.18 ohms
Inductance 1.47 mH
Xmax ± 4.40 mm
Qms 3.75
Qes 0.56
Qts 0.49
Vas 81.67 l

Voice coil diam. 37 mm
Voice coil length 14.8 mm
Former kapton
Layer(s) 1
Wire type flat
Force factor 6.85 NA
Moving mass 20.78 gr

Cone material . . . coated paper
Suspension rubber
Chassis die cast
Total mass 2.20 kg

