


**3/4" - TITANIUM BULLET TWEETER - 20 mm****PROFESSIONAL LINE**


Very high efficiency - 105 dB  
 Pure Titanium diaphragm  
 Field replaceable diaphragm assembly  
 Zamak die cast horn  
 Ferrofluid cooled voice coil  
 Smooth frequency response


Très haut rendement - 105 dB  
 Membrane Titane pur  
 Equipage mobile interchangeable  
 Pavillon Zamak moulé  
 Bobine refroidie par ferrofluide  
 Réponse en fréquence linéaire

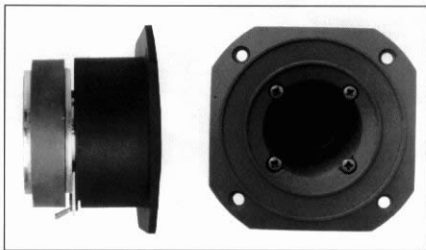

This ring radiator professional horn tweeter features a pure Titanium diaphragm coupled with a solid aluminium phasing bullet for outstanding frequency response, absence of coloration and resistance to metal fatigue effects. The extra lightweight high temperature voice coil wound onto aluminium former is directly glued to the diaphragm and ferrofluid cooled for high power dissipation. Optimized magnet system (1.57 T) for high efficiency (105 dB). Recommended crossover point : 8 kHz at 18 dB/octave. A crossover design is suggested in Fig. 1 and corresponding chart for matching this driver with midranges in our line is provided.

Ce tweeter professionnel à diaphragme annulaire en Titane pur associé à une ogive en aluminium massif procure une réponse en fréquence parfaitement linéaire. Cette structure garantit une excellente tenue à la fatigue et ne génère aucune coloration. L'extrême légèreté de la bobine mobile sur support aluminium, directement collée sur le diaphragme et refroidie par ferrofluide assure une bonne dissipation thermique, garantie d'une excellente tenue en puissance. La structure magnétique optimisée (1,57 T) procure un très haut rendement (105 dB). Fréquence de coupure recommandée : 8 kHz à 18 dB/octave. Un schéma de filtre passe-bas est proposé (Fig 1) pour un raccordement optimisé aux médiums de notre série.

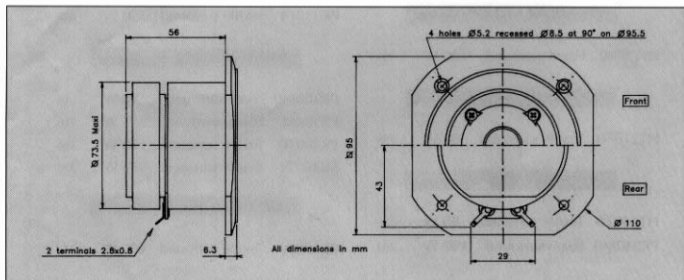

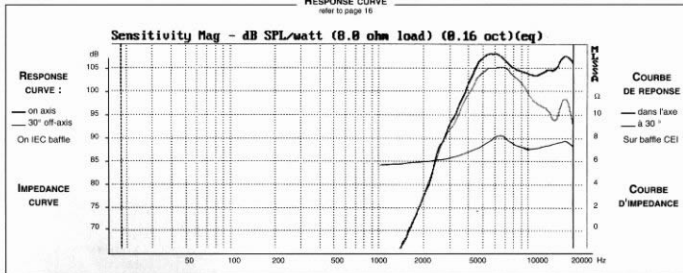**RESPONSE CURVE**  
 refer to page 16


## SPECIFICATIONS

Technical Characteristics	Symbol	Value	Units
---------------------------	--------	-------	-------

### PRIMARY APPLICATION

Nominal Impedance	Z	8	$\Omega$
Resonance Frequency	Fs	8000	Hz
Nominal Power Handling	P	120	W
Sensitivity	E	105	dB

### VOICE COIL

Voice coil diameter	$\varnothing$	20	mm
Minimum Impedance	Zmin	7.5	$\Omega$
DC Resistance	Re	6.3	$\Omega$
Voice Coil Inductance	Lbm	0,06	mH
Voice coil Length	h	2	mm
Former	-	Aluminium	-
Number of layers	n	2	-

### MAGNET

Magnet dimensions	$\varnothing \times h$	72 x 15	mm
Magnet weight	m	0,24	kg
Flux density	B	1,57	T
Force factor	BL	-	NA
Height of magnetic gap	He	3	mm
Stray flux	Fmag	-	Am <sup>2</sup>
Linear excursion	Xmax	-	mm


### PARAMETERS

Suspension Compliance	Cms	-	mN <sup>-1</sup>
Mechanical Q Factor	Qms	-	-
Electrical Q Factor	Qes	-	-
Total Q Factor	Qts	-	-
Mechanical Resistance	Rms	-	kg s <sup>-1</sup>
Moving Mass	Mms	-	kg
Effective Piston Area	S	-	m <sup>2</sup>
Volume Equivalent of Air at Cas	Vas	-	m <sup>3</sup>
Mass of speaker	M	1,16	kg


## APPLICATION PARAMETERS

Fc	Crossover Frequency	Hz
S	Slope	dB / Oct.
L	Self-inductance	mH
C	Capacitor	$\mu$ F
P	Nominal Power Handling	W

### IMPULSE RESPONSE




### WATERFALL

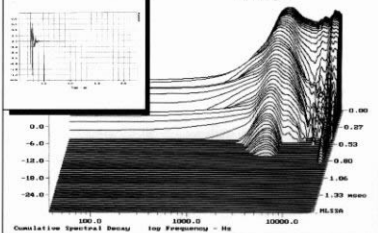 refer to page 16


## SUGGESTED APPLICATIONS

refer to page 8 to 13

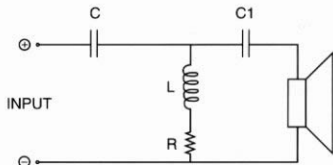

Fc	S	L	R	C	C1	P
8000	18	0,25	0,5	2	1,8	120