





15FW76-4

Rev: 0

Frequency Response

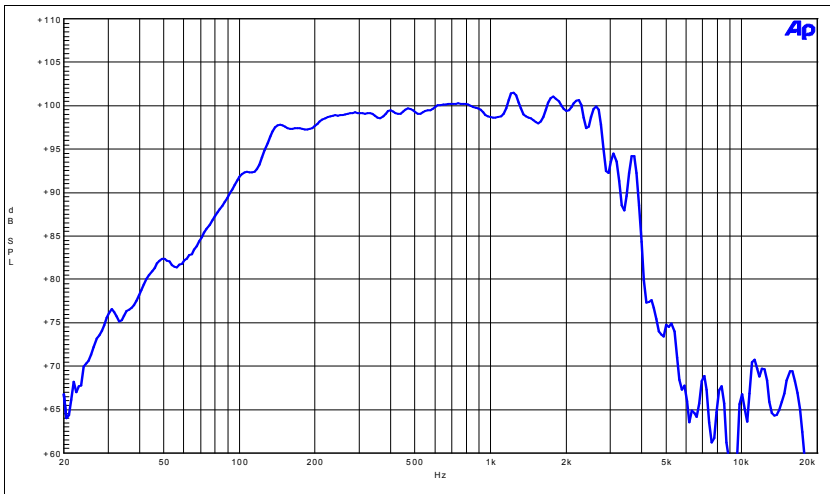

Impedance

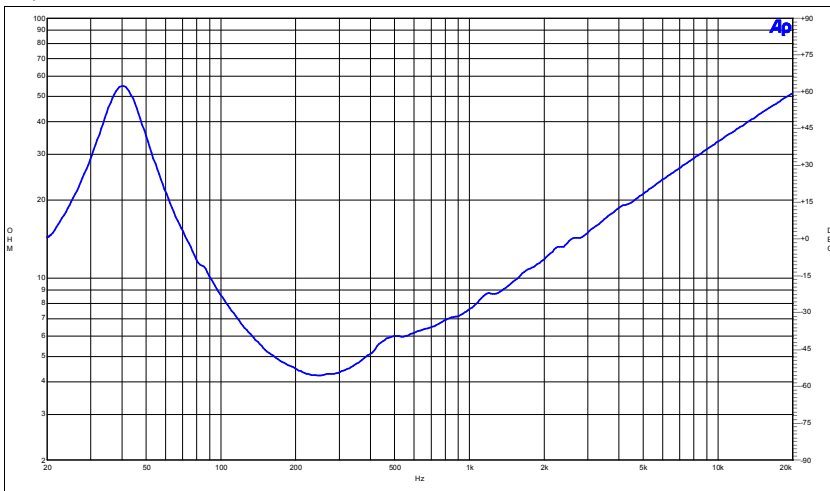

Specifications

Nominal Diameter	15"
Nominal Impedance	4 Ω
Minimum Impedance	4,2 Ω
Power Handling	
Nominal ¹	600 W
Continuous Program ²	1.200 W
Sensitivity (1W/1m) ³	100 dB
Frequency Range	Fs to 2500 Hz
Voice Coil Diameter	76,00 mm
Winding Material	Copper
Former Material	Fiber Glass
Winding Depth	19,50 mm
Magnetic Gap Depth	11 mm
Flux Density	1,25 T
Surround Material	PolyCotton
Surround Shape	Triple Roll
Spider Material	Cotton
Magnet Material	Ceramic
Cone Material	Paper
Water Proof Front Side (WP)	<input checked="" type="checkbox"/>
Water Proof Both Sides (TWP)	<input type="checkbox"/>
Epoxy Treatment	<input type="checkbox"/>
Demodulation Ring	<input checked="" type="checkbox"/>
Shorting Copper Ring	<input type="checkbox"/>
Double Spider	<input checked="" type="checkbox"/>
Vented Gap	<input type="checkbox"/>

29/12/2011

Thiele & Small Parameters⁴

Fs	42 Hz
Re	3,0 Ω
Qes	0,18
Qms	3,20
Qts	0,17
Vas	135,0 dm ³
Sd	855 cm ²
η ₀	5,20 %
Xmax	7,0 mm
Xvar	8,00 mm
Mms	113,0 g
Bl	22,44 Txm
Le	1,04 mH
Cms	131,0 μm/N

Mounting Information

Overall Diameter	393 mm (15.5 in)
Bolt Circle Diameter	374 mm (16.7 in)
Baffle Cutout Diameter	353 mm (13.9 in)
Depth	180 mm (7,0 in)
Flange / Gasket Thickness	15 mm (5/8 in)
Net Weight	10,0 Kg (22 lb)

(1) A.E.S. Standard

(2) Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

(3) Applied RMS Voltage is set to 2V for 4 ohms Nominal Impedance. Average SPL from 200 to 2000 Hz

(4) Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.