

GREEN LABEL

GREEN LABEL SPEAKERS ARE PRIMED FOR HIGH-POWER ROCK PERFORMANCES, WHERE A FULL-BODIED, WARM, DEFINED TONE IS ESSENTIAL.




BL15-400X

BASS GUITAR LOUDSPEAKER



Frequency Response and Impedance Curves

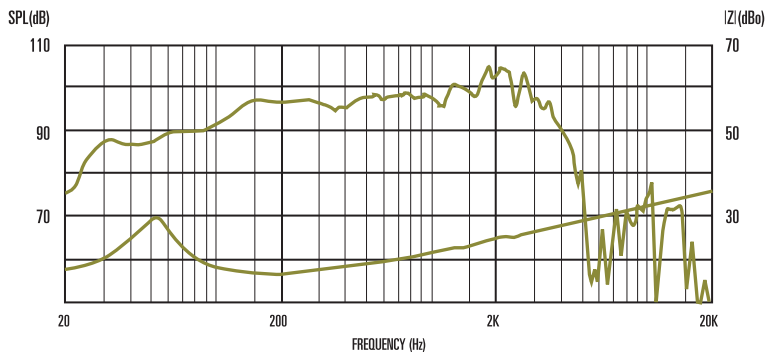

General Parameters

Nominal diameter	381mm/15in
Power Rating (rms)	400W
Nominal impedance	8Ω
Voice coil diameter	76.2mm/3in
Magnet type	Ferrite
Sensitivity	96dB
Frequency range	40-3500Hz
Coil material	Copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Xmax	4.75mm/0.18in
Gap depth	8mm/0.31in
Voice coil winding width	17.5mm/0.68in

Small Signal Parameters

D	0.33m/12.99in
Fs	54.2Hz
Mmd	66.47g/2.35oz
Mair	14.15g/0.499oz
Qms	3.578
Qes	0.709
Qts	0.592
Re	5.8Ω
Vas	110.85lt/3.91ft ³
Bl	14.98Tm
Cms	0.107mm/N
Rms	7.67kg/s
Le	1.0mH

Mounting Information

Diameter	385mm/15.2in
Overall depth	162mm/6.4in
Cut-out diameter	351mm/13.8in
Mounting slot dimensions	9.2 x 6.2mm/0.36 x 0.24in
Number of mounting slots	8
Mounting slot PCD	369mm/14.5in
Unit weight	4.9kg/10.8lb