

GREEN LABEL

GREEN LABEL SPEAKERS ARE PRIMED FOR HIGH-POWER ROCK PERFORMANCES, WHERE A FULL-BODIED, WARM, DEFINED TONE IS ESSENTIAL.




BN10-300X

BASS GUITAR LOUDSPEAKER



Frequency Response and Impedance Curves

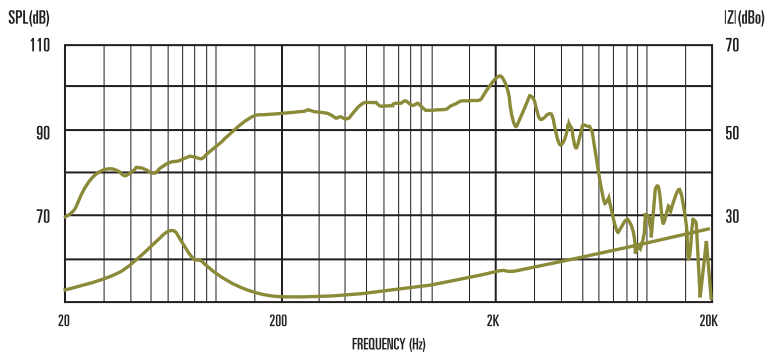

General Parameters

Nominal diameter	254mm/10in
Power Rating (rms)	300W
Nominal impedance	4Ω
Voice coil diameter	63.5mm/2.5in
Magnet type	Neodymium
Sensitivity	96dB
Frequency range	40-2500Hz
Coil material	Copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Xmax	4mm/0.15in
Gap depth	8mm/0.31in
Voice coil winding width	16mm/0.62in

Small Signal Parameters

D	0.21m/8.27in
Fs	64.2Hz
Mmd	35.81g/1.26oz
Mair	3.64g/0.128oz
Qms	3.327
Qes	0.497
Qts	0.433
Re	3.03Ω
Vas	29.16lt/1.03ft ³
Bl	9.39Tm
Cms	0.172mm/N
Rms	4.34kg/s
Le	0.33mH

Mounting Information

Diameter	256mm/10.1in
Overall depth	112mm/4.4in
Cut-out diameter	229mm/9in
Mounting slot dimensions	6 x 8mm/0.24 x 0.31in
Number of mounting slots	4
Mounting slot PCD	245mm/9.6in
Unit weight	1.6kg/3.5lb

Unit conditioned prior to measurement.