

GREEN LABEL

GREEN LABEL SPEAKERS ARE PRIMED FOR HIGH-POWER ROCK PERFORMANCES, WHERE A FULL-BODIED, WARM, DEFINED TONE IS ESSENTIAL.




BN15-300X

BASS GUITAR LOUDSPEAKER



Frequency Response and Impedance Curves

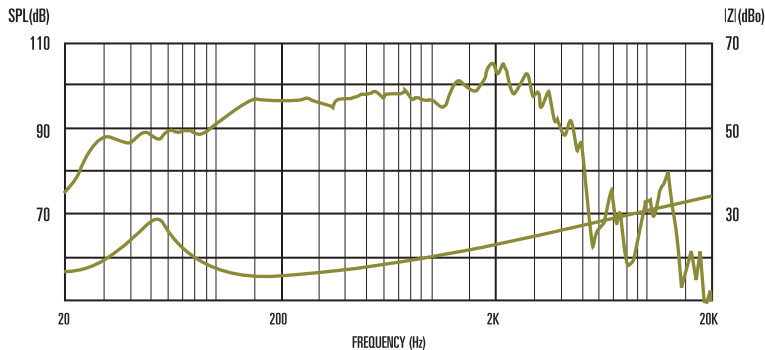

General Parameters

Nominal diameter	381mm/15in
Power Rating (rms)	300W
Nominal impedance	8Ω
Voice coil diameter	63.5mm/2.5in
Magnet type	Neodymium
Sensitivity	96dB
Frequency range	42-3500Hz
Coil material	Copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Xmax	4mm/0.15in
Gap depth	8mm/0.31in
Voice coil winding width	16mm/0.62in

Small Signal Parameters

D	0.33m/12.99in
Fs	45.9Hz
Mmd	66.89g/2.36oz
Mair	14.15g/0.499oz
Qms	4.162
Qes	0.705
Qts	0.603
Re	5.7Ω
Vas	153.37lt/5.41ft ³
Bl	13.76Tm
Cms	0.148mm/N
Rms	5.621kg/s
Le	0.88mH

Mounting Information

Diameter	385mm/15.2in
Overall depth	152mm/6in
Cut-out diameter	351mm/13.8in
Mounting slot dimensions	9.2 x 6.2mm/0.36 x 0.24in
Number of mounting slots	8
Mounting slot PCD	369mm/14.5in
Unit weight	2.3kg/5.1lb

Unit conditioned prior to measurement.