



## 6,5" - Extended Range

<b>Program Power</b>	<b>200 W</b>
<b>Rated impedance</b>	<b>4 Ohm</b>
<b>Nominal diameter</b>	<b>6,5" - 165 mm</b>
<b>Sensitivity (1W/1m)</b>	<b>93 dB</b>
<b>Voice coil diameter</b>	<b>1,5 in - 38 mm</b>
<b>Frequency Range</b>	<b>80-8000 Hz</b>

### SPECIFICATIONS

Nominal Diameter	6,5" - 165 mm
Rated Impedance	4 Ohm
Nominal Power Handling <sup>1</sup>	80 W
Program Power <sup>2</sup>	200 W
Sensitivity <sup>3</sup>	93 dB
Frequency Range <sup>4</sup>	80-8000 Hz
Minimum Impedance	-
Gasket Material	Steel
Magnet Material	Ferrite
Cone Material	Doped cellulose fiber
Cone Shape	Exponential
Surround	Doped fabric
Suspension	-
Voice Coil Diameter	1,5 in - 38 mm
Voice Coil Winding Material	-
Voice Coil Length	6 mm - 0,24 in
Voice Coil Former Material	Kapton
Connection type	Faston
Ferrofluid	No
Magnetic Gap Height	6 mm - 0,24 in
Max. Peak to Peak Excursion	-
Efficiency Bandwidth Product EBP	194
Recommended Loading	Vented Box
Volume / Tuning frequency	10 Lt (dm <sup>3</sup> ) - 0,353 cuft / 85 Hz
Maximum recommended frequency	-
Alternative Available Version	8 Ohm PM160

### T/S PARAMETERS



4 Ohm

Resonance frequency	Fs	66 Hz
DC Resistance	Re	3,55 Ohm
Mechanical Q Factor	Qms	7,26
Electrical Q Factor	Qes	0,34
Total Q Factor	Qts	0,32
BI Factor	BI	6,58 Tm
Effective Moving Mass	Mms	8,5 g
Equivalent Cas air loaded	Vas	17,7 lt (dm <sup>3</sup> ) - 0,63 cuft
Suspension Compliance	Cms	0,7 mm/N
Effective Piston Diameter	D	131 mm - 5,16 in
Effective piston area	Sd	135 cm <sup>2</sup> - 20,93 sq in
Max. Linear Excursion <sup>5</sup>	Xmax	1,25 mm - 0,05 in
Voice Coil Inductance @ 1kHz	Le	0,11 mH
Half-space Efficiency	η0	1,46 %

### NOTES

- <sup>1</sup> Nominal power is determined according to AES2-1984 (r2003) standard.
- <sup>2</sup> Program Power is defined as 3 dB greater than the Nominal rating.
- <sup>3</sup> Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
- <sup>4</sup> Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- <sup>5</sup> Linear Math. Xmax is calculated as (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is the gapdepth.
- <sup>6</sup> Frequency response curve is measured on infinite baffle conditions.
- <sup>7</sup> Impedance curve is measured in free air conditions at small signals.

### FREQUENCY RESPONSE AND IMPEDANCE CURVE <sup>6 7</sup>

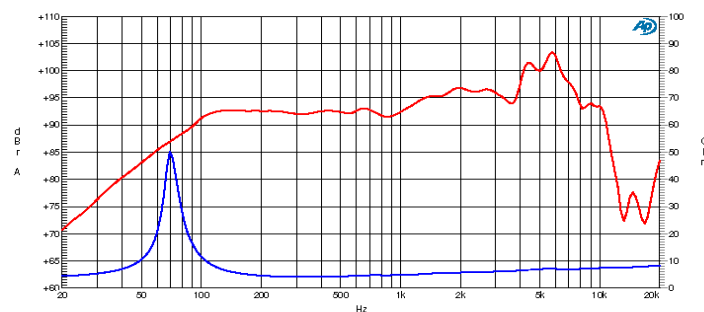

### MOUNTING AND SHIPPING INFORMATION

Overall Diameter	165,5 mm - 6,52 in
Baffle Cutout Diameter	142 mm - 5,59 in
Flange and Gasket Thickness	7 mm - 0,28 in
Total Depth	80 mm - 3,15 in
Bolt Circle Diameter	156 mm - 6,14 in
Bolt Holes Quantity and Diameter	4 / 5 mm - 0,2 in
Net Weight	2,4 Kg - 5,29 lb
Shipping Units	6 Pcs