


25 SCAT DS

Impédance 4 Ohms
Sensibilité 94 dB/2.8 V/1 m
Puissance RMS 120 W
Bobine Fil cuivre. dia. 37 mm
Support Alu.
Membrane Carbone traité

Diamètre aimant 120 mm
Diametre hors tout 320 mm
Trous de fixation 4 dia.6 mm sur dia. 294mm
Poids 3.5 Kg

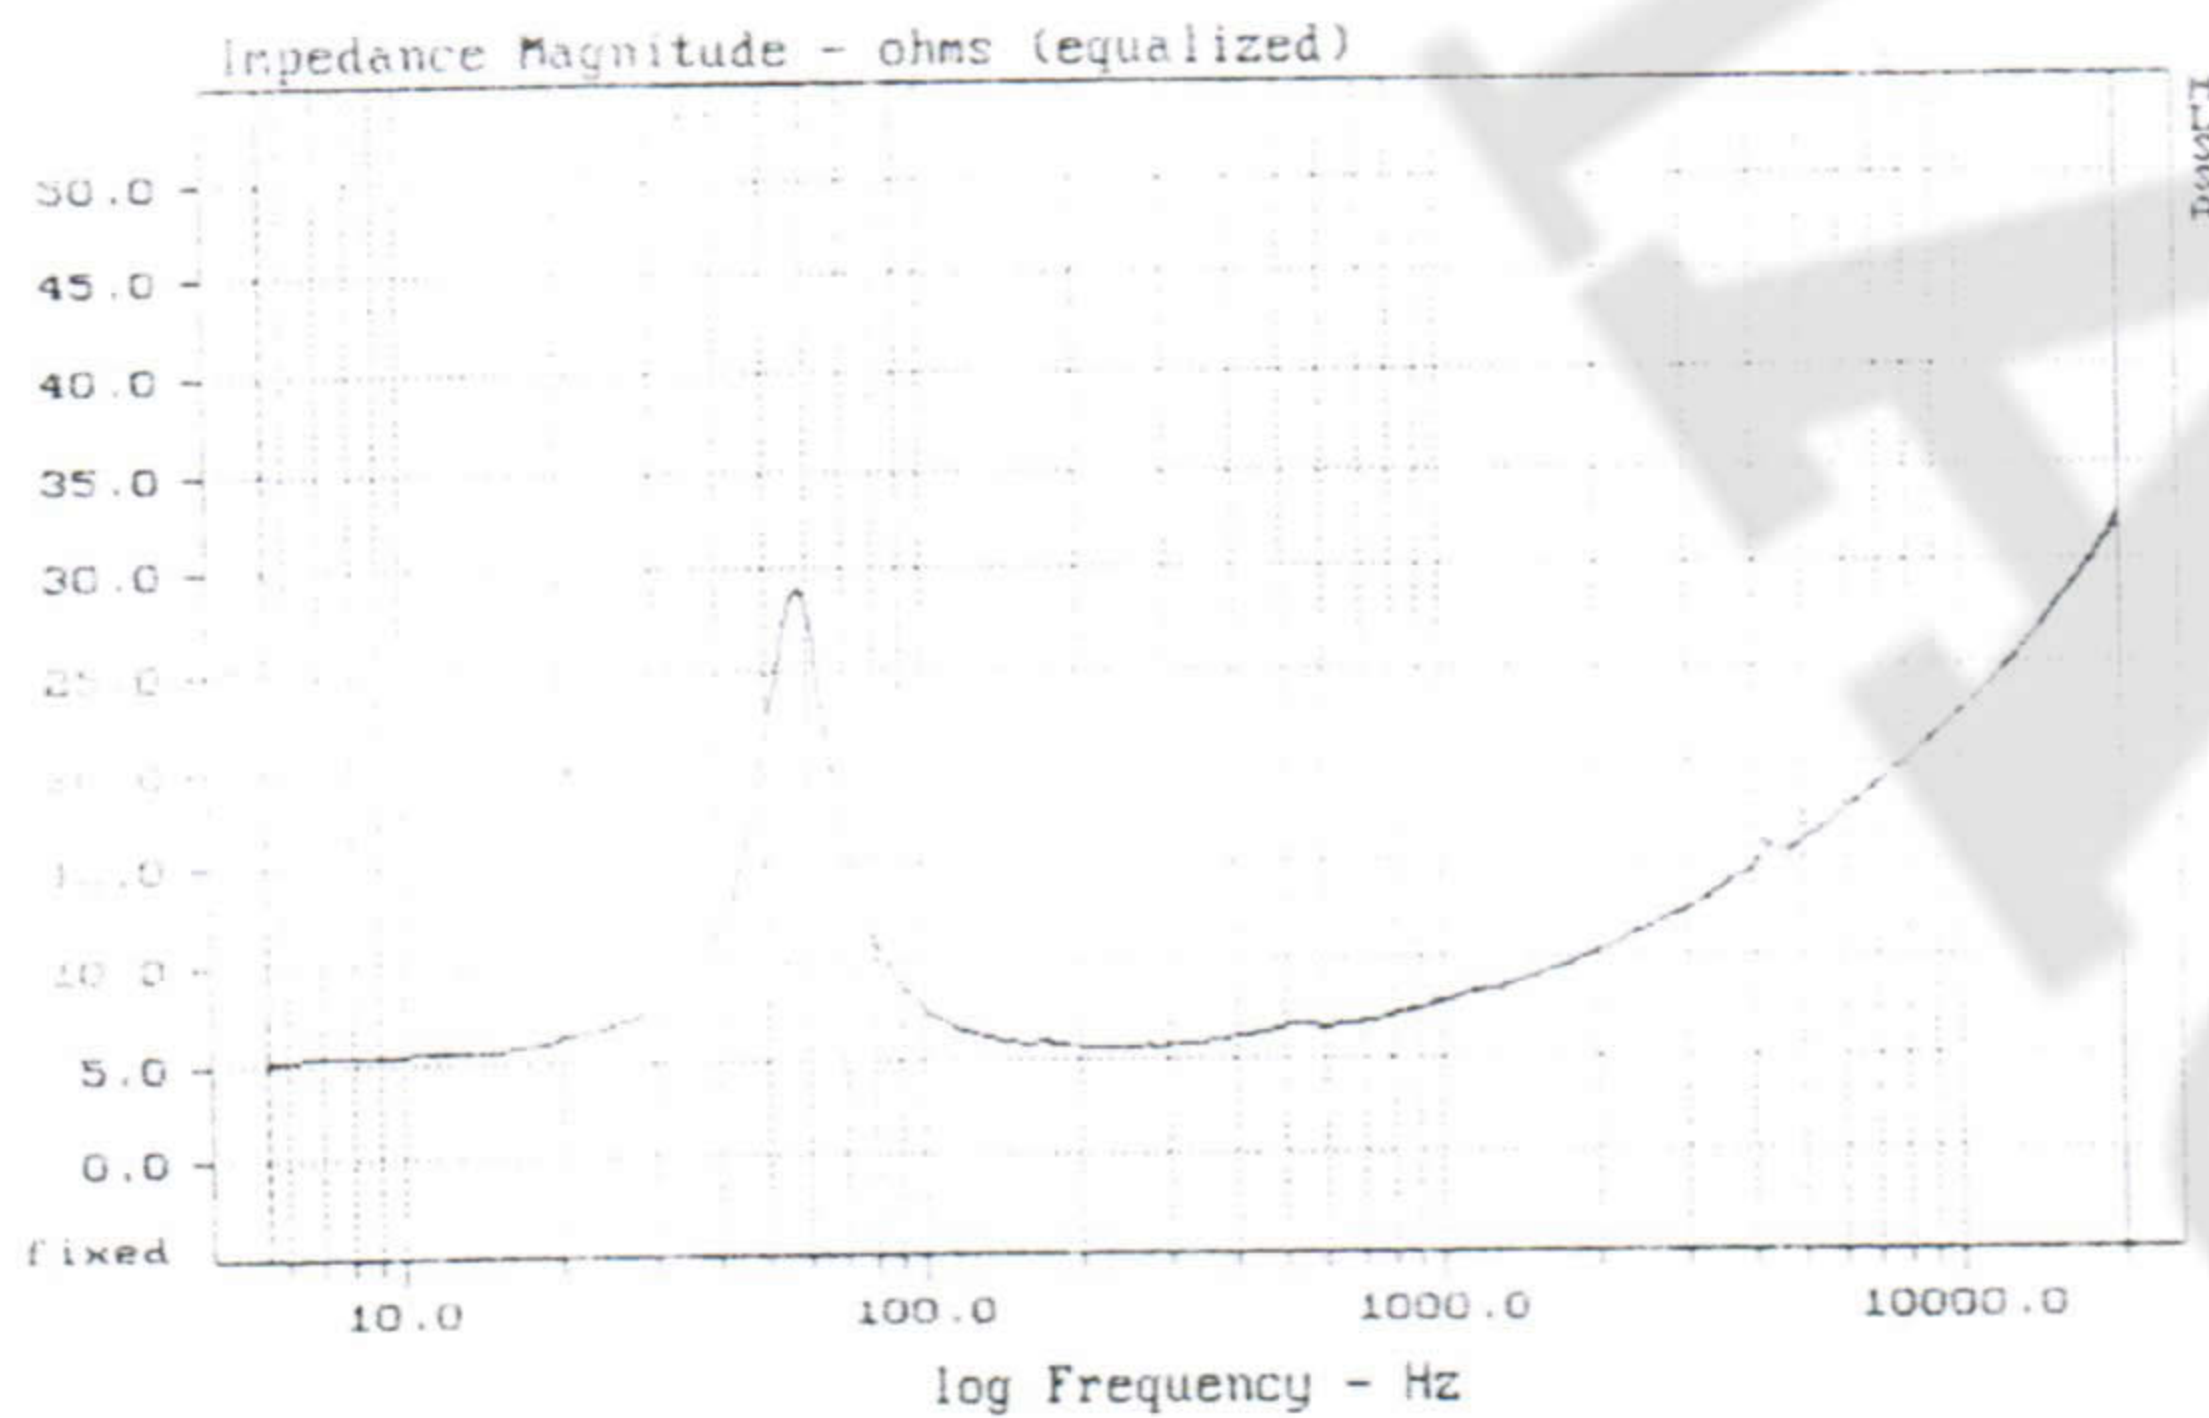

Parametres Thiele & Small

Fs	57.5 Hz
Re	4.9 Ohms
Res	27.5 Ohms
Zmax	28.5 Ohms
Qms	4.07
Qes	0.74
Qts	0.63
L	0.45 mH
Vas	38.2 l
Mms	30.7 g
Cms	250 µm/Newton
Radiating area	330 cm ²
Bl	8.6 Tesla-m

Enceinte close	60 l.
Enceinte bass-reflex	75 l.
Event Bass-reflex	dia. 70, long. 60
Free-air	

