


Twt28_vHP

28mm soft dome tweeter.



28mm soft dome designed to provide the best performances in its price range. Thanks to the technical innovation, it challenges many more expensive competitors. Very clear and detailed sounding. We recommend to use this tweeter from 2500 with 12dB/Oct. high-pass filter.

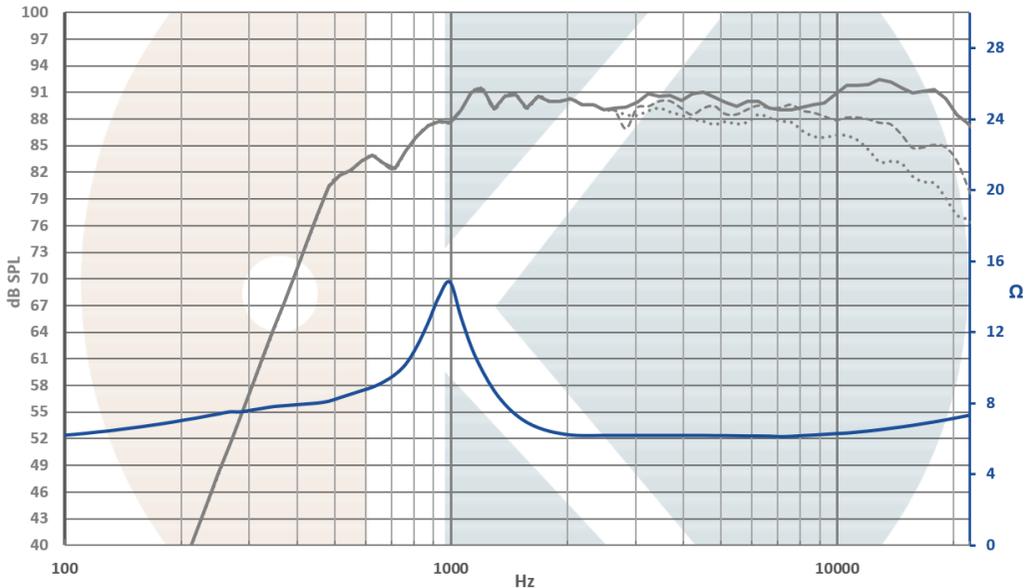

On IEC baffle / Distance: 1m / Signal input: 2,83V / High pass filter at 500Hz (48dB/Oct)
Dash curve : 30° & 60° / Smoothing: 1/12 Octave

Twt28_vHP

Our products can be adapted to your technical requirements and brand spirit.
www.Kartesian-acoustic.com - France



Advanced construction

Membrane
 Proprietary treated Nylon
 Ø28mm soft dome

Suspension
 Integrated on the dome

Voice coil:
 Ø28mm, CCA wire
 Aluminum former

Motor structure:
 High grade Ferrite magnet
 Advanced and vented pole pieces
 16500 Gauss on 2.4mm height

Frame
 Aluminum injected front plate
 Back chamber built in the motor structure

T&S


Fs 1000Hz
 SPL 90dB/2.8V/1m
 Re 5.2Ω

Qms -
 Qts -
 Bl 2.65N/A

VAS -
 Mms 0.24g
 Sd 6.16cm²

Linear excursion: +/-0.15mm
 Maximal excursion: +/-0.3mm

Nominal power: 20W
 Maximal power handling: 40W
(with high-pass filter, 12dB/Oct at 2200Hz)

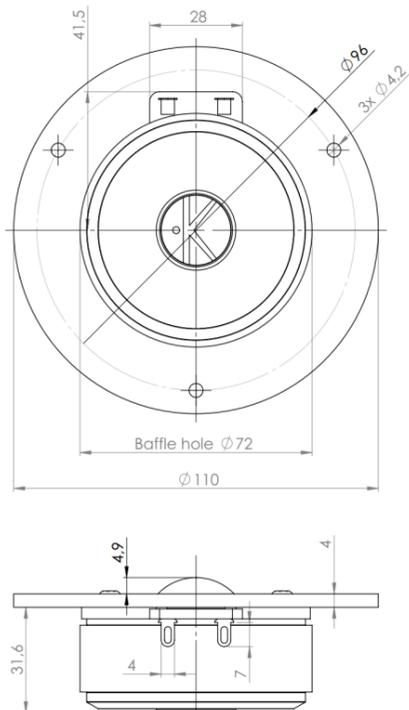

Integrated innovation



Visit our website to discover our innovation

Twt28_vHP

Our products can be adapted to your technical requirements and brand spirit.
www.kartesian-acoustic.com - France



Twt28_vHP

