



KEY FEATURES:

92 db 1W / 1m average sensitivity 38 mm high temperature cooper voice coil 300 W AES program power Ferrite 121 mm magnet structure

Application: Power bass speaker

The **6B150** is high efficiency, high power bass loudspeaker, specially designed to use in compact bass reflex boxes. It features 38 mm cooper voice coil, vented aluminium die cast frame with powerful ferrite magnet structure, which achieved compact size of the speaker.





SPECIFICATIONS

Nominal Diameter 6.5"/170 mm 8 Ohm Impedance Minimum Impedance 6.4 Ohm Power Capacity AES ¹ 150 W Program Power ² 300 W

Sensitivity (200-2000 Hz) 92 dB/W/m

60 - 3000 Hz Frequency Range

Voice Coil Diameter 38 mm Voice Coil Material Cooper Voice Coil Former Kapton™ Voice Coil Winding Depth 14 mm Magnet Gap Depth 6 mm

Cone Material Paper with glassfiber Die cast aluminium Basket

Magnet Ferrite Flux Density 1.2 T

1. AES standard. Power is calculated on rated minimum impedance. Measurement is in 9 L box enclosure tuned 70 Hz using a 100 - 2000 Hz band limited pink noise test signal applied continuously for 2 hours.

2. Program power is defined as 3db greater than AES Power Capacity.

MOUNTING INFORMATION

V.C. Inductance at 1 kHz (Le)

THIELE-SMALL PARAMETERS

Mechanical Efficiency Factor (Qms)

Diaphragm mass ind. airload (Mms)

Peak Linear Displacement of Diaphragm (Xmax)*

Mechanical Compliance of Suspension (Cms)

Electrical Efficiency Factor (Qes)

Equivalent Air Volume (Vas)

Effective Diagram Area (Sd)

Voice Coil Resistance Re

Resonance Frequency

Total Q (Qts)

BL Product (BL)

Overall Diameter	185 mm
Baffle Hole Diameter	145 mm
Number of Mounting Holes	4 eliptic 5.5/6.5 mm
Bolt Circle Diameter	170/172 mm
Overall Depth	86 mm
Net Weight	2.4 kg



55.04 Hz

4.72

0.311

0.292

14.61 Litres

16.38 grams

5.60 Ohms

127 cm2

± 5.5 mm


0.51 mm/N

10.11 T.m

0.79 mH

^{*} Linear Mathematical Xmax is calculated as: (Hvc - Hq)/2 + Hq/4 where Hvc is the voice coil depth and Hq is the qap depth.



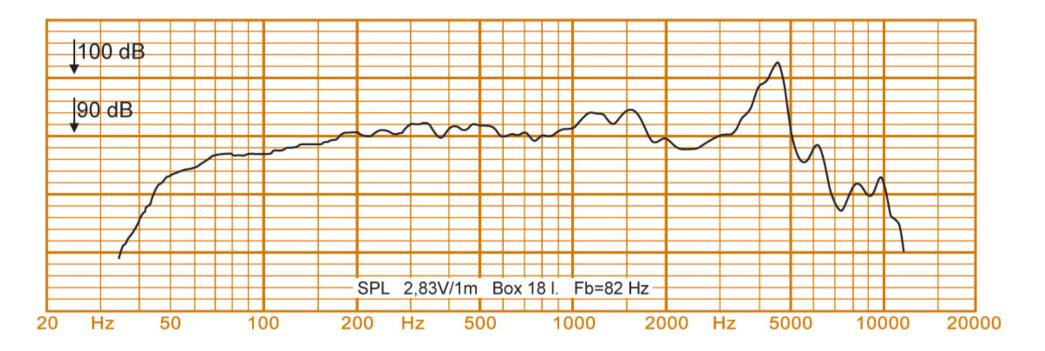

Frequency Responce



OBERTON Professional Loudspeakers

