

KEY FEATURES:

- 1.4" Throat diameter**
- 72 mm (2,85 in.) voice coil**
- 200 W Program Power Capacity (1-20 kHz)**
- 109 dB Sensitivity (1 - 10 kHz)**
- Frequency range 0,5 - 18 kHz**

The D72CN is 1.4" high frequency compression driver, which features a carbon composite dome and high damped vented suspension, providing exceptional high output with low distortion and frequency response with high linearity. It is designed for application in high level professional sound equipment.

SPECIFICATION

Throat diameter	36 mm (1.4 in.)
Nominal impedance	16 Ohms
Minimum impedance	11.7 Ohms
D.C. resistance	10 Ohms
Power capacity (1-20 kHz)	100 W
Program Power Capacity (1-20 kHz)	200 W
Sensitivity (1 - 10 kHz)	109 dB
Frequency range	0,5 - 18 kHz
Recommended crossover	1 kHz or higher 12 dB/oct.min
Voice coil diameter	72 mm (2,85 in.)
Flux density	1,85 T

Positive voltage on red terminal moves diaphragm toward the phasing plug


MATERIALS OF CONSTRUCTION


Diaphragm	carbon composite
Voice coil material	CCAW
Voice coil former	Kapton™


MOUNTING INFORMATION

Overall diameter	180 mm
Depth	81.5 mm
Mounting	4 x M6 on 101,6 mm (4 in.) diameter
Net weight	6.9 kg

Frequency Response

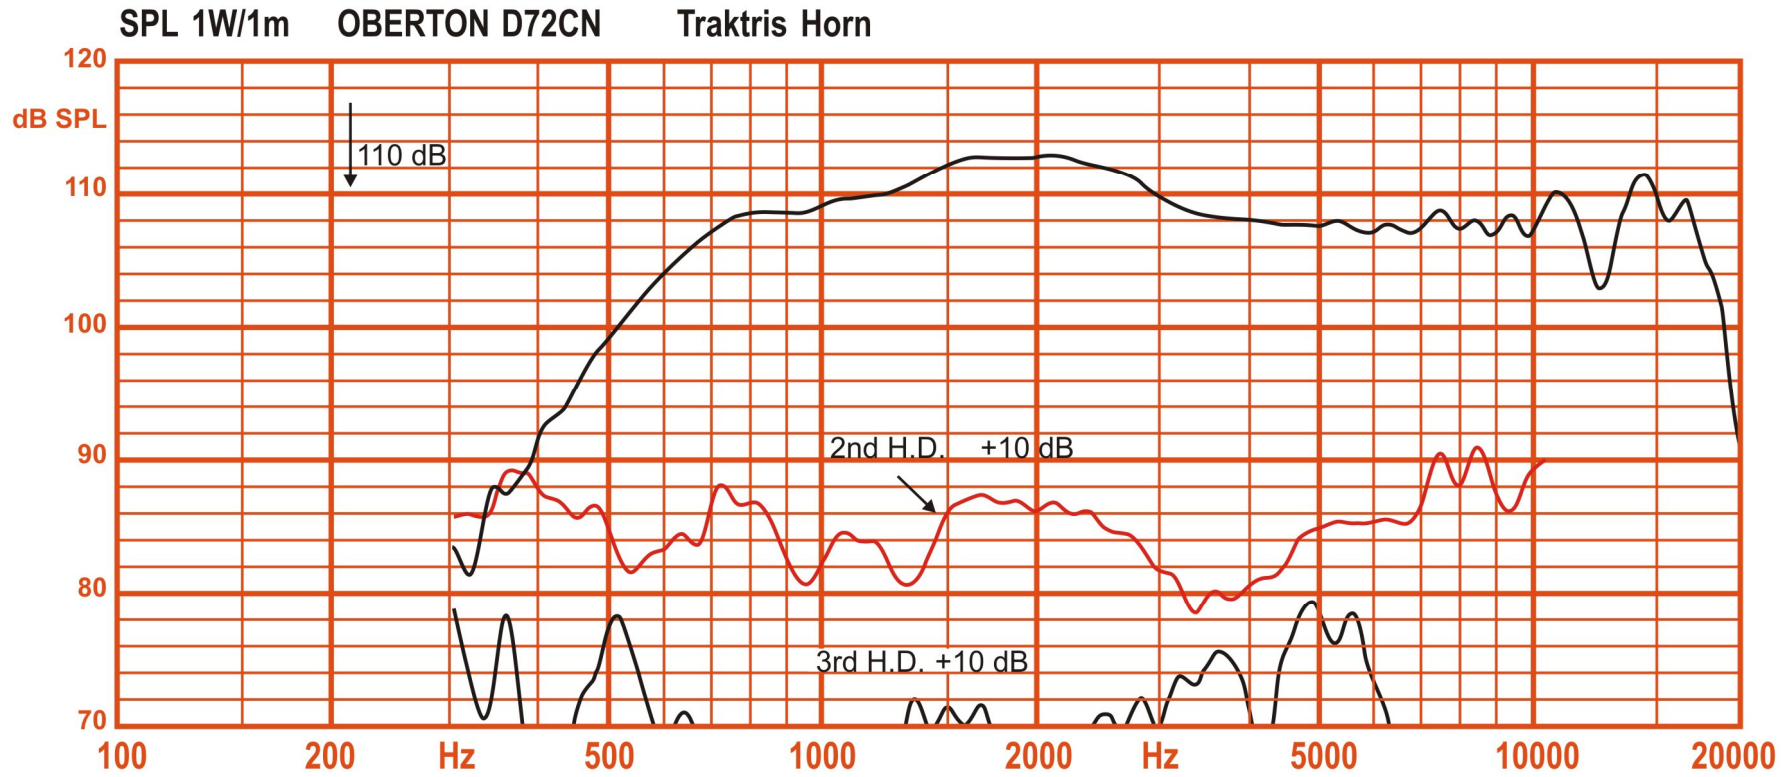

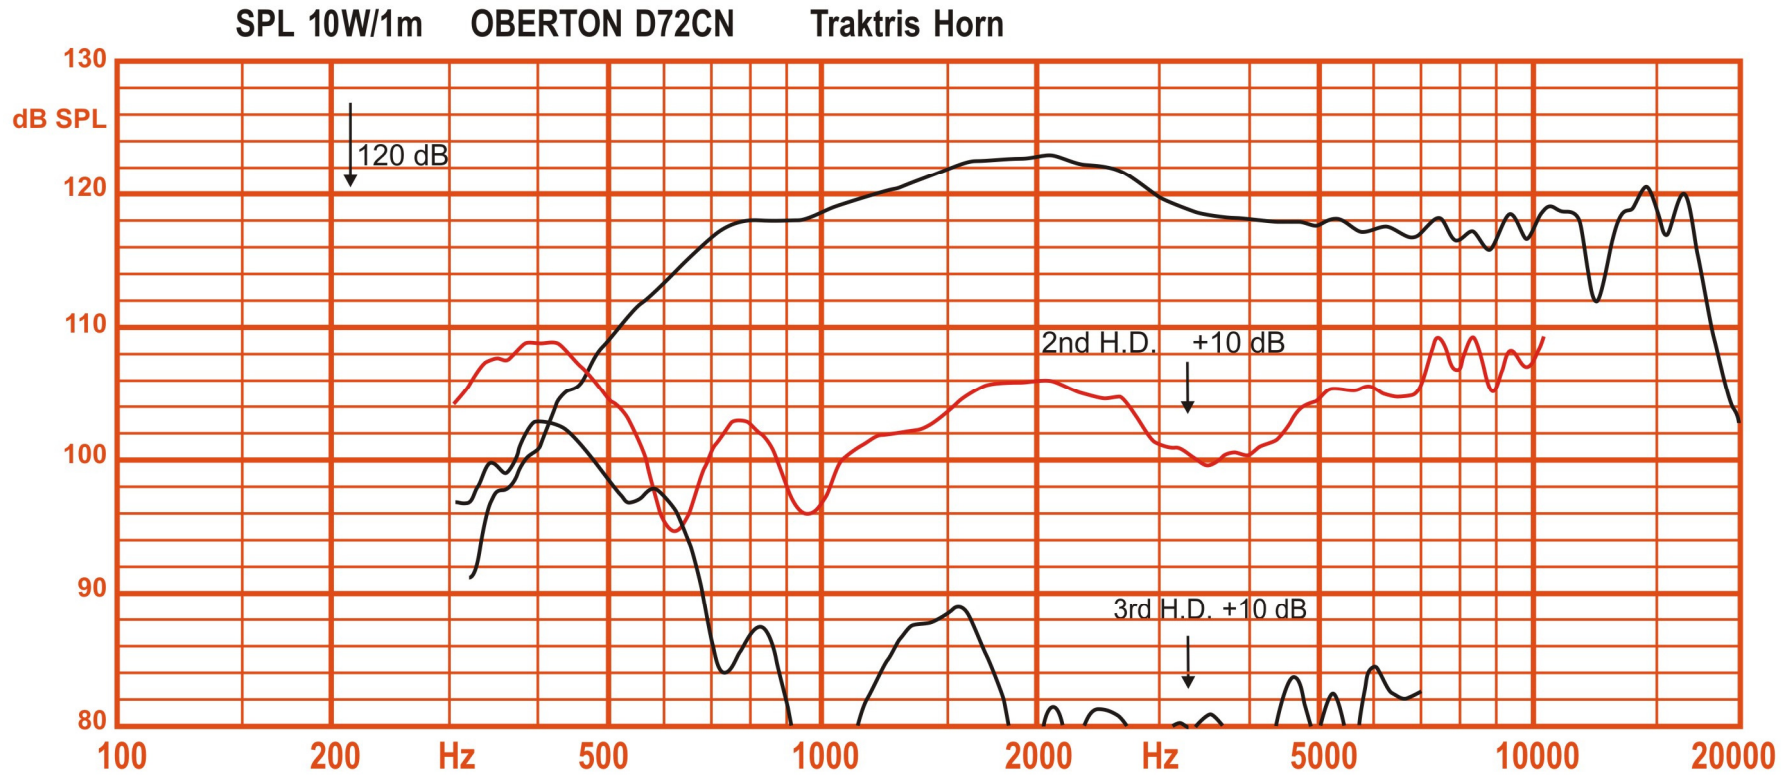

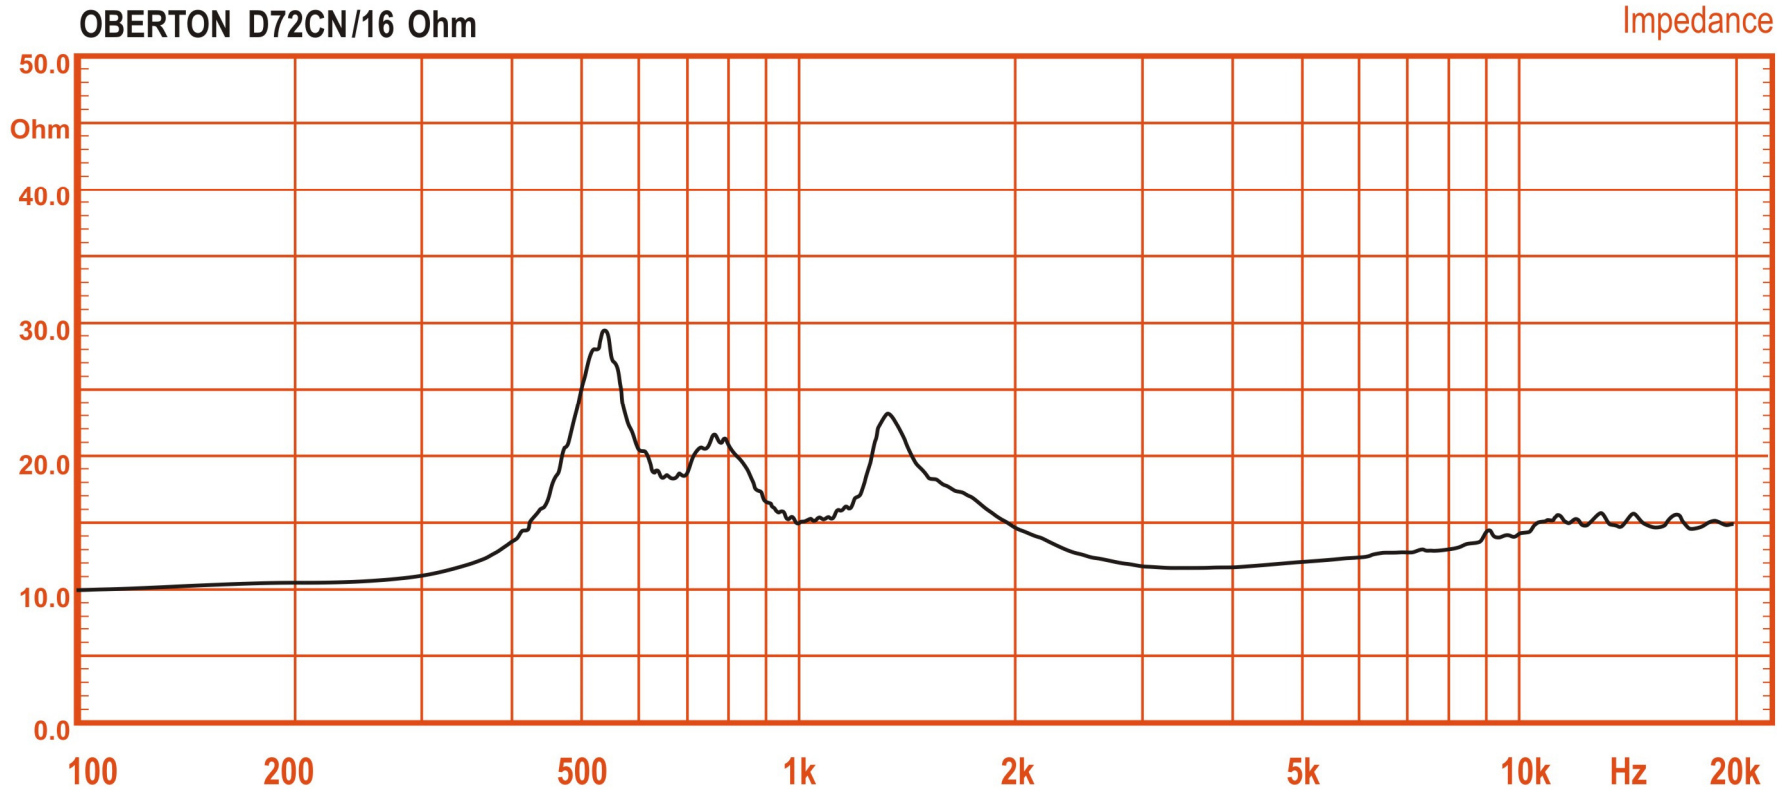

[Download](#) PDF

