

Model No: STW-350F188PR01-04
 Product Line:


Rev 1
 Last Update: 2018-06-05 10:42:53

Product Description

STW subwoofer, 15inch, 188mm voice coil, paper cone, ferrite motor, cast aluminium basket, 4ohm




Mechanical Drawing

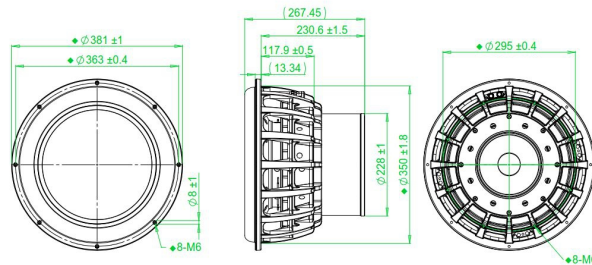

Specifications

DC Resistance	Revc	Ohms	3.2	5.0%	Energy Bandwidth Product	EBP	(1/Qes)*fs	52.89
Minimum Impedance	Zmin	Ohms	4.86	7.5%	Moving Mass	Mms	g	546.13
Voice Coil Inductance	Le	mH	3.31		Suspension Compliance	Cms	um/N	69
Resonant Frequency	Fs	Hz	26.55	15%	Effective Cone diameter	D	cm	31.4
Mechanical Q Factor	Qms		11.39		Effective Piston Area	Sd	cm^2	774.37
Electrical Q Factor	Qes		0.5		Effective Volume	Vas	L	58.16
Total Q Factor	Qts		0.48		Motor Force Factor	BL	Tm	24.18
Ratio Fs/Qts	F	Fs/Qts	55.2		Motor Efficiency Factor	β	(T*M^2)/Ohms	182.66
Half Space Sensitivity @2.83V	db@2.83V/1M	dB	83.54	+/- 1.0db	Voice coil former Material	VCfm	Til	0.2mm
Half Space Sensitivity @1W/1M	db@1W/1M	dB	81.37	+/- 1.0db	Voice coil inner diameter	VCd	mm	188
Gap Height	Gh	mm	36		Rated Noise Power	P	W	3500
Maximum Linear Excursion	Xmax	mm	10.4		Test Spectrum Bandwidth		20-20KHz	
Ferrofluid Type	FF				Transducer Size	Inch	15	
Transducer Mass	Kg	26.6						

Frequency and Impedance Response

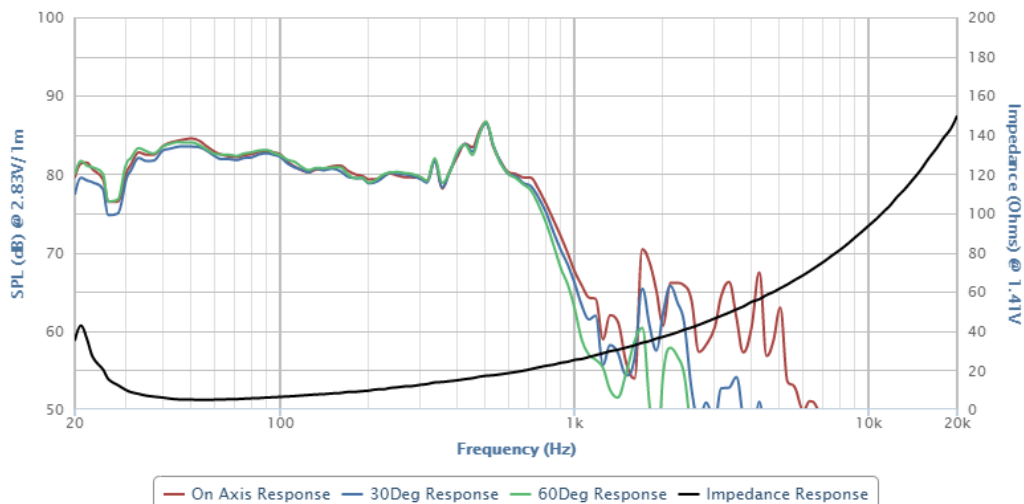

Highcharts.com