



2520NdM

Nominal Diameter	8" / 20 cm
Rated Impedance	8 Ω
Sensitivity	98 dB SPL
Power Handling Capacity	200 W AES
SPL max (continuous)	118 dB SPL
Usable frequency range	200 - 5000 Hz
Speaker net mass	2 kg

8 inches midrange driver



Architecture highlights :

- Midrange unit with critical damping diaphragm
- Ultra light CCAR voice coil
- Natural convection Intercooler System
- High efficiency ultra low THD neodymium magnet system
- Low profile with flat motor

Motor architecture

Magnet material	-	Nd
Voice coil diameter	mm	51
Voice coil length	mm	10
Air gap height	mm	8

Typical characteristics


Rated impedance	Z	Ω	8
Half space sensitivity (1W@1m)	-	dB SPL	98,0
Usable freq. range	-	Hz	200 - 5000
Power handling capacity (AES)	-	W	200
Max Sound Pressure Level	SPL _{max}	dB SPL	118
Min. impedance modulus	Z _{min}	Ω@Hz	6.8@500
Voice-coil inductance @ 1kHz	L _{e1k}	mH	0,989
Voice-coil inductance @ 10kHz	L _{e10k}	mH	0,420
BL product	BL	N/A	14,2
Moving mass	M _{ms}	kg	0,0200

Thiele-Small parameters

Resonance frequency	F _s	Hz	110 (±25)
DC Resistance	R _e	Ω	5.8 (±0.6)
Mechanical quality factor	Q _{ms}	1	5,31
Electrical quality factor	Q _{es}	1	0,40
Total quality factor	Q _{ts}	1	0,37
Suspension compliance	C _{ms}	10 ⁻⁶ .m/N	110
Effective piston area	S _d	m ²	0,0241
Equivalent Cas air load	V _{as}	m ³	0,0086
Max linear excursion	X _{max}	mm	± 2,0
Linear displacement volume	V _d	10 ⁻³ .m ³	0,0481
Reference efficiency	η ₀	%	2,8
Unity load volume	V _{as} .Q _{ts} ²	10 ⁻³ .m ³	1,2

Absolute maximum ratings

Short term max. input voltage	V _{max}	V	80
Max.excursion before damage	X _{dam}	mm	± 4,0
Ambient operating temperature	T _a	°C	-10 to +50
Storage temperature		°C	-20 to +70
Environmental withstanding			Humidity proof

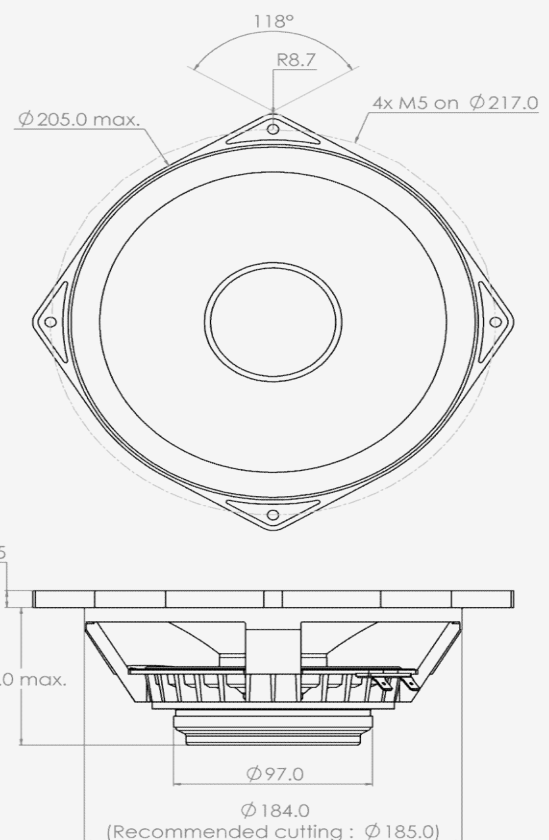

Mounting information

Air volume occupied by the driver	10 ⁻³ .m ³	0,65
Speaker net mass	kg	2,00
Baffle cut-out diameter (front mounting)	mm	185,0
Bolt number & Metric diameter	-	4x M5
Bolt circle diameter	mm	217,0
Max overall dimension (on ears)	mm	234,0
Max overall dimension (out of ears)	mm	205,0
Flange height	mm	9,5
Max magnet diameter	mm	97,0
Max depth (front mounting)	mm	78,0
Recommended reflex box	Lts / Hz	-
Electrical connection		6.35x0.8 FASTON




2520NdM

8 inches midrange driver


SPL curves measured on CEI standard baffle :

- . at 25 cm, normalised 1 m
- . at 1 m for reference
- . Graph amplitude = 60 dB (PHL Audio standard)

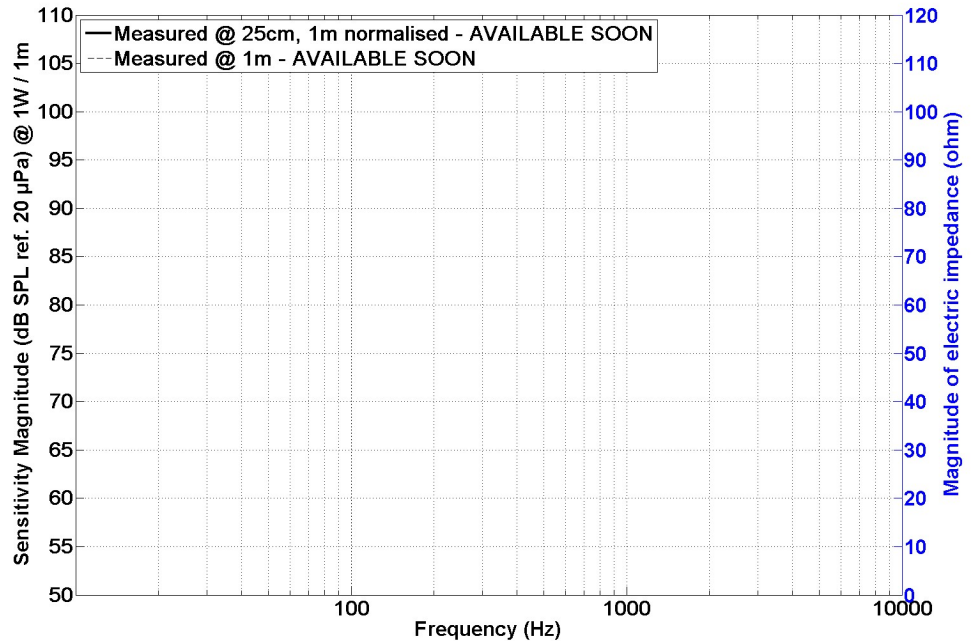

HD curve measured on CEI standard baffle :

- . at 1 meter
- . at power = $P_{AES} / 4$
- . Graph amplitude 0.01 % to 100 % (PHL Audio standard for $P_{AES}/4$)

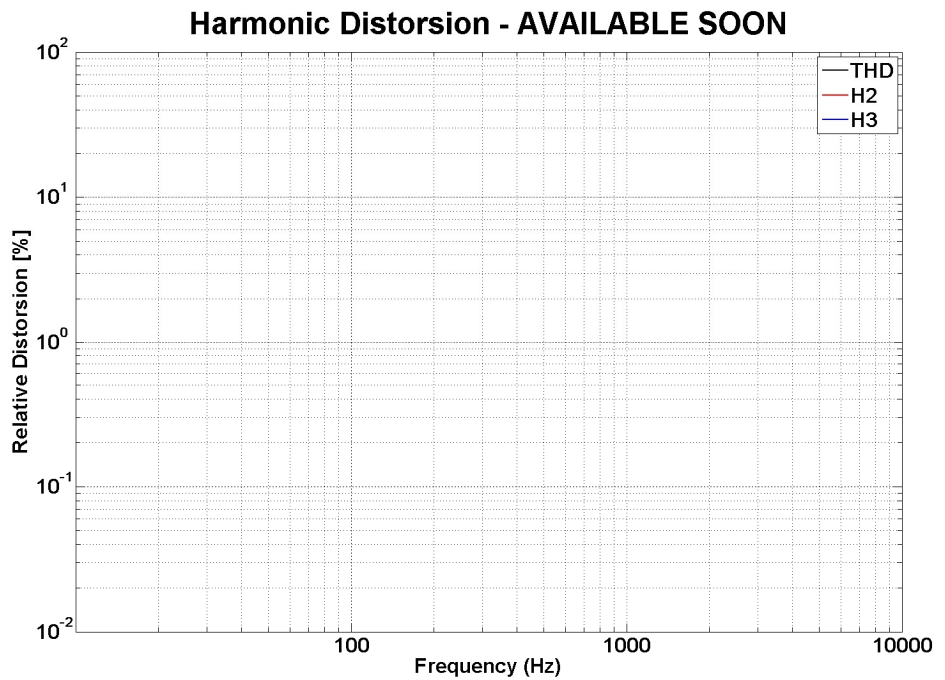

Non linear curves measured thanks to Klippel software and hardware, in free air

