

Over a decade ago, Radian Audio Engineering went into business with a commitment to manufacture loudspeaker components that accurately reproduce the full frequency range of the audio spectrum. We began by building coaxial loudspeakers and compression drivers. The Radian 651PB, 760PB and the 850PB, with a 3.0" diaphragm, represent the refinement of our design efforts in 2" exit-format compression driver technology.

All Radian compression drivers feature heat-treated structural alloy aluminum diaphragm domes which form an optimum balance of strength and low weight. This is a key factor in extending high frequency response.

Radian diaphragms utilize a Mylar® surround which not only enhances the diaphragm's reliability, but eliminates fatigue which destroys other compression driver diaphragms.

In addition to being virtually indestructible, Mylar® surrounds provide excellent dampening characteristics which translate into smooth, low-distortion, linear output devoid of the resonant peaks typically present in diaphragms made with metal surrounds.

Beyond the obvious advantages of our Mylar®-aluminum composite construction, Radian diaphragms utilize high temperature voice coil formers and advanced adhesives which allow Radian compression drivers to sustain high RMS and peak power levels over extended periods of time.

Radian diaphragm assemblies are self-aligning and may be rapidly serviced in the field by simply removing the three screws on the driver's backcap and replacing the old unit with a new one.

Superior sound quality, unparalleled power handling, extended high frequency response and high reliability make our compression drivers the preferred choice of loudspeaker system manufacturers, consultants, contractors, designers and engineers around the world. They are ideal for use in high output, high power touring sound systems and stage monitors, while their low distortion, high fidelity and linear response delivers clear, crisp music and speech for theatrical, auditorium, stadium, convention and church installations.



- ✓ **EXTENDED HIGH FREQUENCY RESPONSE**
- ✓ **2.0" THROAT**
- ✓ **50, 60, 75 WATTS RMS**
- ✓ **MYLAR® SUSPENSION**
- ✓ **HIGH SENSITIVITY**

# 651PB/760PB/850PB




## 2" COMPRESSION DRIVERS


### SPECIFICATIONS

|                                   | 651PB  | 760PB  | 850PB  |
|-----------------------------------|--|--|--|
| FREQUENCY RESPONSE . . . . .      | 500 Hz – 20 kHz  | 500 Hz – 20 kHz  | 500 Hz – 20 kHz  |
| MAXIMUM POWER HANDLING* . . . . . | 50 watts RMS   | 60 watts RMS   | 75 watts RMS   |
| SENSITIVITY . . . . .             | 110 dB, one watt<br>at one meter                               | 111 dB, one watt<br>at one meter                               | 113 dB, one watt<br>at one meter                               |
| RECOMMENDED CROSSOVER . . . . .   | 500 Hz, 24 dB/octave<br>1200 Hz, 12 dB/octave                  | 500 Hz, 24 dB/octave<br>1200 Hz, 12 dB/octave                  | 500 Hz, 24 dB/octave<br>1200 Hz, 12 dB/octave                  |
| NOMINAL IMPEDANCE . . . . .       | 8 or 16 ohms   | 8 or 16 ohms   | 8 or 16 ohms   |
| D.C. RESISTANCE . . . . .         | 6.2 or 12.4 ohms (±10%)  | 6.2 or 12.4 ohms (±10%)  | 6.2 or 12.4 ohms (±10%)  |
| VOICE COIL DIAMETER . . . . .     | 3.0" (76.2mm)  | 3.0" (76.2mm)  | 3.0" (76.2mm)  |
| THROAT DIAMETER . . . . .         | 2.0" (50.8mm)  | 2.0" (50.8mm)  | 2.0" (50.8mm)  |
| VOICE COIL MATERIAL . . . . .     | Edgewood copper-<br>clad aluminum                              | Edgewood copper-<br>clad aluminum                              | Edgewood copper-<br>clad aluminum                              |
| DIAPHRAGM MATERIAL . . . . .      | 0.002" (0.05mm) heat-<br>treated aluminum alloy                | 0.002" (0.05mm) heat-<br>treated aluminum alloy                | 0.002" (0.05mm) heat-<br>treated aluminum alloy                |
| DIAPHRAGM SUSPENSION . . . . .    | Mylar®   | Mylar®   | Mylar®   |
| MAGNET . . . . .                  | 49.6 oz. (1.41 kg)<br>Ferrite V                                | 49.6 oz. (1.41 kg)<br>Ferrite V                                | 72.0 oz. (2.04 kg)<br>Ferrite V                                |
| FLUX DENSITY . . . . .            | 16,400 gauss   | 17,000 gauss   | 19,000 gauss   |
| INPUT CONNECTORS . . . . .        | Goldplated push-<br>button terminals                           | Goldplated push-<br>button terminals                           | Goldplated push-<br>button terminals                           |
| MOUNTING . . . . .                | Four 1/4-20 studs,<br>on 4.0" (101.6mm) centers                | Four 1/4-20 studs,<br>on 4.0" (101.6mm) centers                | Four 1/4-20 studs,<br>on 4.0" (101.6mm) centers                |
| DIMENSIONS . . . . .              | 6.50" (165.1mm) diameter,<br>2.62" (66.5mm)<br>deep less studs | 6.50" (165.1mm) diameter,<br>2.85" (72.4mm)<br>deep less studs | 7.50" (190.5mm) diameter,<br>2.85" (72.4mm)<br>deep less studs |
| WEIGHT . . . . .                  | 9.0 lbs. (4.18 kg)   | 11.0 lbs. (5.09 kg)  | 14.6 lbs. (6.63 kg)  |

\*EIA Standard RS-426A through a 1 kHz 24 dB/octave Linkwitz-Riley crossover

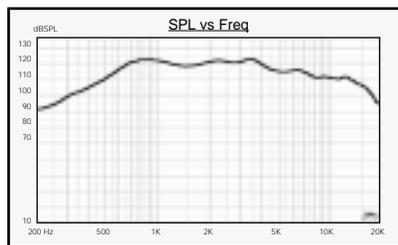


Amplitude vs. Frequency of the Radian 651PB measured on a 2" (50.8mm) high frequency horn with a one watt (2.83 Vrms) input at 8 ohms.

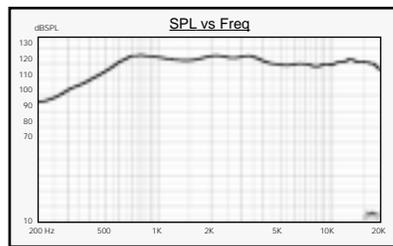

Amplitude vs. Frequency of the Radian 760PB measured on a 2" (50.8mm) high frequency; horn with a one watt (2.83 Vrms) input at 8 ohms.

Amplitude vs. Frequency of the Radian 850PB measured on a 2" (50.8mm) high frequency horn with a one watt (2.83 Vrms) input at 8 ohms.

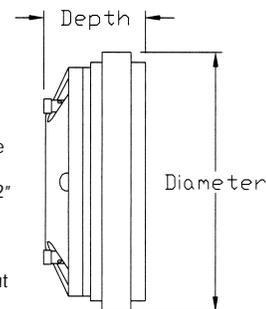

Mylar is a registered trademark of Dupont.

Specifications subject to change without notice.

#### LIMITED WARRANTY

Radian Audio Engineering, Inc. products, when sold domestically, are guaranteed for a period of five (5) years from the date of original purchase against malfunctions due to defects in workmanship. If such a malfunction occurs, the product will be repaired or replaced at our option, without charge, if delivered prepaid to the factory. Product will be returned prepaid via ground transport. This warranty does not extend to damage resulting from improper installation, misuse, neglect or abuse. The warranty does not apply to external finish or appearance. The warranty does not apply to burnt voice coils. In no event shall Radian Audio Engineering, Inc. be liable for incidental or consequential damages including, without limitation, injury to persons or property or loss of use.

600 N. Batavia Street

Orange, CA 92868

Phone: (714) 288-8900

Fax: (714) 288-1133

E-mail: [radian@radianaudio.com](mailto:radian@radianaudio.com)

Web: [www.radianaudio.com](http://www.radianaudio.com)