




# REVELATOR

## MIDRANGE

## 12M/4631G00

The Revelator midranges are well known for their sliced paper cone technology. The slices are filled with damping glue, which dramatically reduces break-up modes in the diaphragm. In combination with Scan-Speaks low-loss linear suspension it represented a breakthrough in midrange clarity and overall smooth frequency response characteristics.

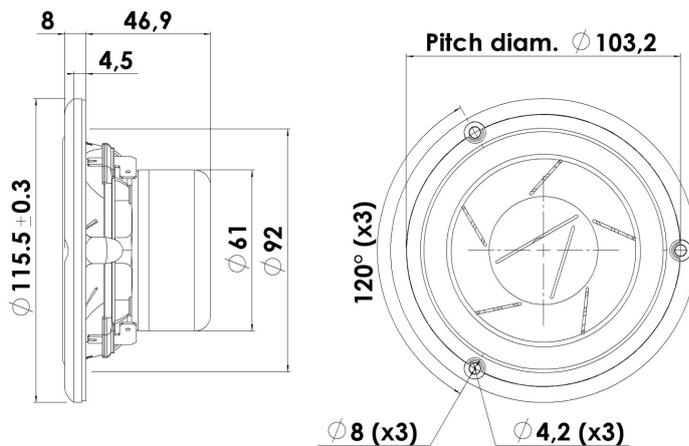

### KEY FEATURES:

- Excellent Midrange reproduction
- Low-Loss Linear Suspension
- Compact Neodymium Magnet System
- Sliced Cone (Controls Cone Breakups)
- High Output 89dB @ 2,83V

#### T-S Parameters

Resonance frequency [fs]	75 Hz
Mechanical Q factor [Qms]	5.57
Electrical Q factor [Qes]	0.35
Total Q factor [Qts]	0.33
Force factor [Bl]	5.3 Tm
Mechanical resistance [Rms]	0.55 kg/s
Moving mass [Mms]	6.5 g
Compliance [Cms]	0.69 mm/N
Effective diaph. diameter [D]	79 mm
Effective piston area [Sd]	49 cm <sup>2</sup>
Equivalent volume [Vas]	2.3 l
Sensitivity (2.83V/1m)	89 dB
Ratio Bl/√Re	2.96 N/√W
Ratio fs/Qts	228 Hz

#### Notes:

IEC specs. refer to IEC 60268-5 third edition.  
All Scan-Speak products are RoHS compliant.  
Data are subject to change without notice.  
Datasheet updated: April 23, 2014.

#### Electrical Data

Nominal impedance [Zn]	4 $\Omega$
Minimum impedance [Zmin]	3.8 $\Omega$
Maximum impedance [Zo]	54.1 $\Omega$
DC resistance [Re]	3.2 $\Omega$
Voice coil inductance [Le]	0.22 mH

#### Power Handling

100h RMS noise test (IEC 17.1)*	40 W
Long-term max power (IEC 17.3)*	70 W

\*Filter: 2. order HP Butterworth, 200 Hz

#### Voice Coil & Magnet Data

Voice coil diameter	38 mm
Voice coil height	10 mm
Voice coil layers	2
Height of gap	4 mm
Linear excursion	± 3 mm
Max mech. excursion	± 7 mm
Unit weight	0.6 kg







# REVELATOR

## MIDRANGE

## 12M/4631G00

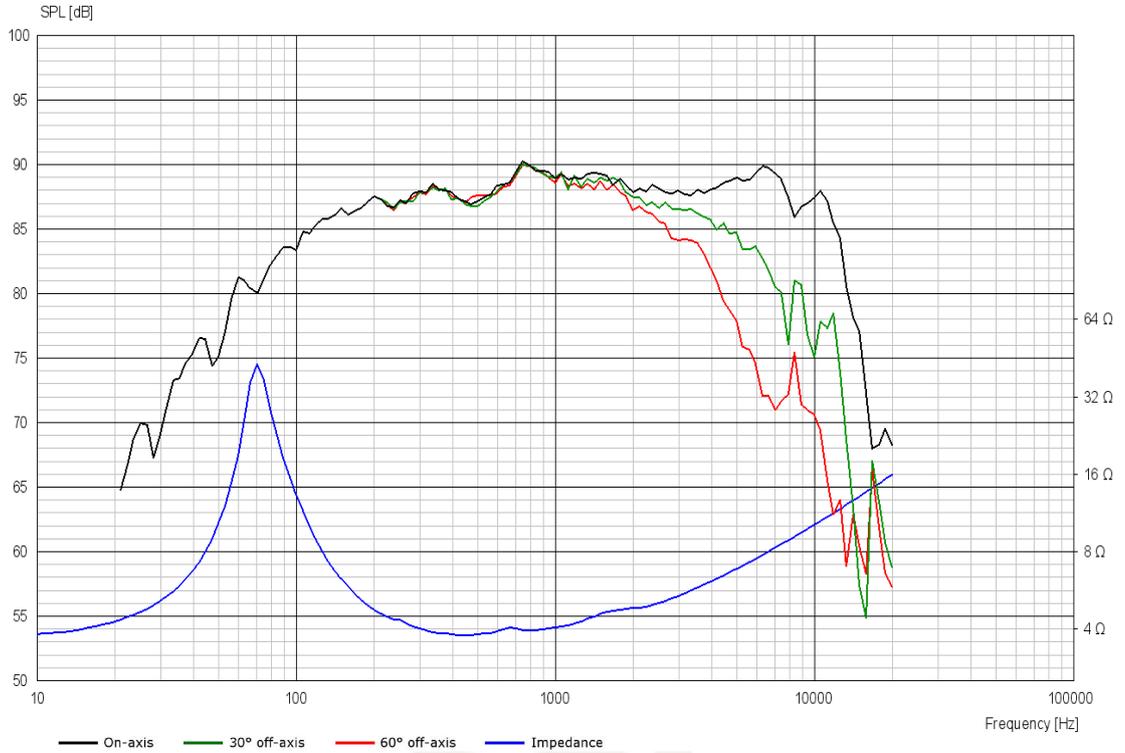

### Advanced Parameters (Preliminary)

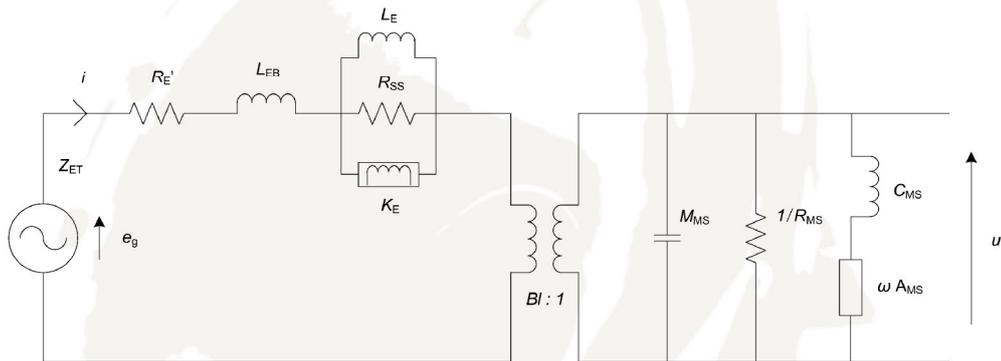

#### Electrical data

Resistance [ $R_{E'}$ ]	3.25 $\Omega$
Free inductance [ $L_{EB}$ ]	0.059 mH
Bound inductance [ $L_E$ ]	0.35 mH
Semi-inductance [ $K_E$ ]	0.028 SH
Shunt resistance [ $R_{SS}$ ]	145 $\Omega$

#### Mechanical Data

Force Factor [ $BI$ ]	5.18 Tm
Moving mass [ $M_{MS}$ ]	7.1 g
Compliance [ $C_{MS}$ ]	0.48 mm/N
Mechanical resistance [ $R_{MS}$ ]	0.73 kg/s
Admittance [ $A_{MS}$ ]	0.04 mm/N

