


- 3" voice coil Kapton former
- Ferrite magnet circuit
- 96.3 dB sensitivity




Specifications	
Nominal Diameter	385mm (15")
Nominal Impedance	8Ω
Rated Power AES <sup>(1)</sup>	350W
Continuous Program Power <sup>(2)</sup>	700W
Sensitivity @ 1W/1m <sup>(3)</sup>	96.3dB
Voice Coil Diameter	75mm (3")
Voice Coil Winding Depth	15mm
Magnetic Gap Depth	10mm
Flux Density	1.10T
Magnet Weight	1800g
Net Weight	7.85kg

Thiele & Small Parameters <sup>(4)</sup>			
Re	6.63Ω	Fs	42.6Hz
Qms	16.55	Qes	0.43
Qts	0.42	Mms	90.4g
Cms	155μm/N	Bxl	19.27Tm
Vas	124.6l	Sd	754.8cm <sup>2</sup>
X max <sup>(5)</sup>	+/-4.0mm	X var <sup>(6)</sup>	+/-6.4mm
η <sub>0</sub>	2.14%	Le (1kHz)	1.55mH

Constructive Characteristics	
Magnet	: Ferrite
Basket Material	: Pressed Sheet Steel
Voice Coil Winding Material	: Copper
Voice Coil Former Material	: Kapton
Cone Material	: Paper
Cone Treatment	: No
Surround Material	: Treated Cloth
Dust Dome Material	: Solid Paper

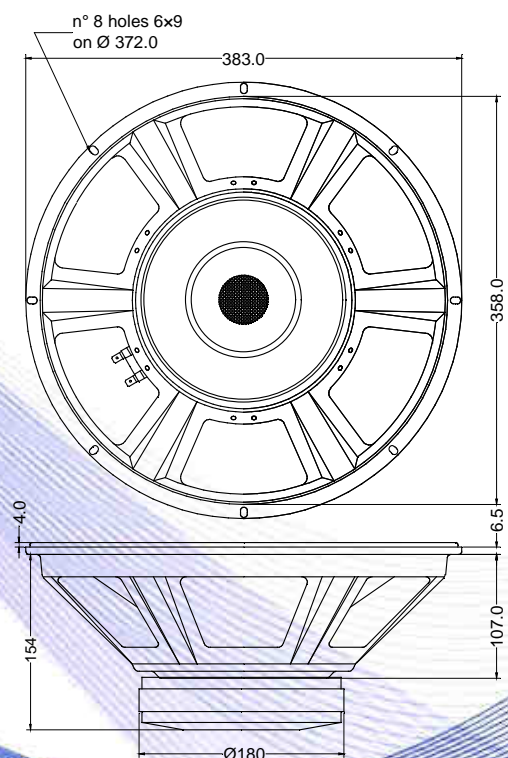

Frequency Response on IEC Baffle (DIN 45575) @ 1W,1m – Free Air Impedance

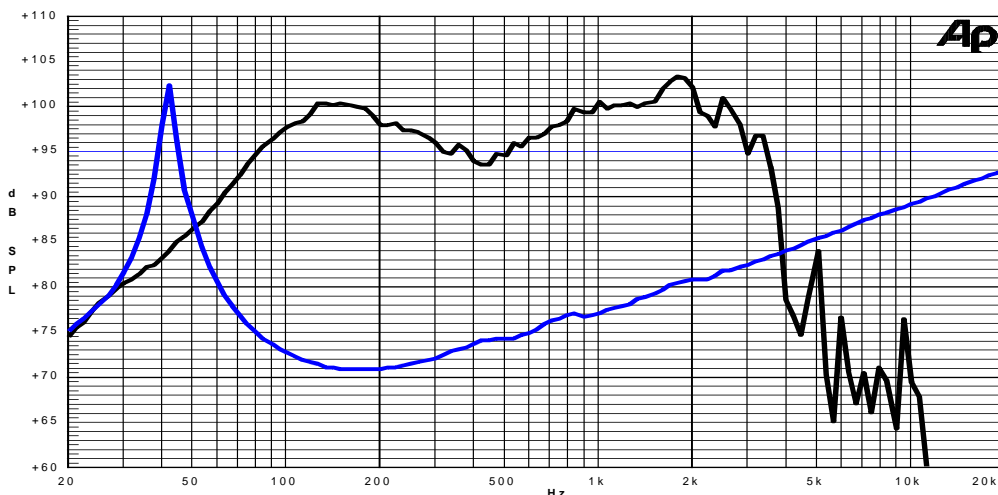

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
  - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
  - 3: Calculated by Thiele & Small parameters
  - 4: Thiele & Small parameters measured with laser system without preconditioning test
  - 5: Measured with respect to a THD of 10% using a parameter-based method
  - 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
  - 7: Drawing dimensions: mm
  - 8: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle

Due to continuing product improvement, the features and the design are subject to change without notice.

11/11/13