



Copper Cap

## Fabric Diaphragm



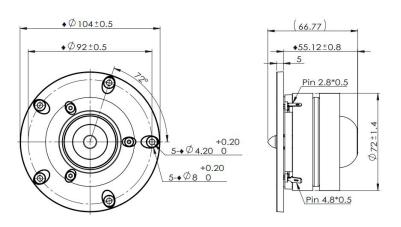

SPECIFICATIONS			
Transducer Size		25	mm
Impedance		4	Ω
Frequency Range <sup>1</sup>		2000 - 20000	Hz
Sensitivity <sup>2</sup> (2.83V   1W @ 1m)		92.6   89.6	dB
Power Rating (IEC 268-5)		100	W
Voice Coil Size		25.8	mm
Air Gap   Winding Height	H H H vc	2.5   2.3	mm
Net Weight	_	0.783	kg
PARAMETERS <sup>3</sup>			
Eff. Piston Area	S <sub>d</sub>	6.61	cm <sup>2</sup>
DC Resistance	R <sub>e</sub>	3	Ω
Minimum Impedance	Z <sub>min</sub>	3.4	Ω
Inductance	L <sub>e</sub>	0.016	mH
Resonance Frequency <sup>4</sup>	F <sub>s</sub>	570	Hz
Mechanical Q Factor	Q <sub>ms</sub>	2.67	-
Electrical Q Factor	Q <sub>es</sub>	0.502	-
Total Q Factor	Q <sub>ts</sub>	0.42	-
Moving Mass	M <sub>ms</sub>	0.303	g
Compliance	C <sub>ms</sub>	260	μm/N
Equivalent Volume	Vas	0.016	L
Motor Force Factor	BI	2.54	Tm
Motor Efficiency	β	2.16	$(BI)^2/R_e$
Linear Excursion <sup>5</sup>	X <sub>max</sub>	0.867	mm

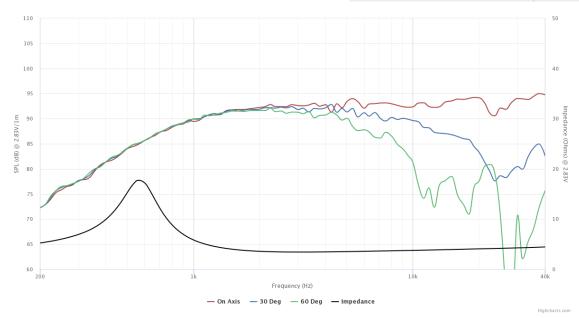

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tymphany Enterprises. All measurements conducted in test lab at 25°C  $\pm 10$ °C, 50%RH  $\pm 10$ %. <sup>1</sup> Specified by Engineering as linear working range of transducer. <sup>2</sup> Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. <sup>3</sup> Measured in Free Air without preconditioning, therefore subject to some deviation. <sup>4</sup> Impedance and Fs value measured under different conditions. <sup>5</sup> Equal/Overhung:  $(H_{vc} - H_{ag})/2 + H_{ag}/3$ . Underhung:  $(H_{ag} - H_{vc})/2 + H_{vc}/3$ . <sup>6</sup> Mechanically limited excursion (e.g. bottoming, spider crash).