



6,5" Ceramic Extended Range

Program Power	200 W
Rated impedance	8 Ohm
Nominal diameter	6,5" - 165 mm
Sensitivity (2,83V/1m)	93 dB
Voice coil diameter	1,5 in - 38 mm
Frequency Range	80-8000 Hz

SPECIFICATIONS

Nominal Diameter	6,5" - 165 mm	
Rated Impedance	8 Ohm	
Nominal Power Handling ¹	80 W	
Program Power ²	200 W	
Sensitivity ³	93 dB	
Frequency Range ⁴	80-8000 Hz	
Minimum Impedance	-	
Gasket Material	Steel	
Magnet Material	Ferrite	
Cone Material	-	
Cone Shape	-	
Surround	Doped fabric	
Suspension	-	
Voice Coil Diameter	1,5 in - 38 mm	
Voice Coil Winding Material	-	
Voice Coil Length	6,5 mm - 0,26 in	
Voice Coil Former Material	Kapton	
Connection type	-	
Ferrofluid	No	
Magnetic Gap Height	6 mm - 0,24 in	
Max. Peak to Peak Excursion	-	
Efficiency Bandwidth Product EBP	206	
Recommended Loading	Vented Box	
Volume / Tuning frequency	10 Lt (dm ³) - 0,353 cuft / 88 Hz	
Maximum recommended frequency	-	
Alternative Available Version	4 Ohm	CM161

T/S PARAMETERS



8 Ohm

Resonance frequency	Fs	66 Hz
DC Resistance	Re	5,9 Ohm
Mechanical Q Factor	Qms	6
Electrical Q Factor	Qes	0,32
Total Q Factor	Qts	0,31
BI Factor	BI	8 Tm
Effective Moving Mass	Mms	8,5 g
Equivalent Cas air loaded	Vas	17,7 lt (dm ³) - 0,63 cuft
Suspension Compliance	Cms	0,7 mm/N
Effective Piston Diameter	D	131 mm - 5,16 in
Effective piston area	Sd	135 cm ² - 20,93 sq in
Max. Linear Excursion ⁵	Xmax	0,75 mm - 0,03 in
Voice Coil Inductance @ 1kHz	Le	0,18 mH
Half-space Efficiency	η0	1,47 %

NOTES

- ¹ Nominal power is determined according to AES2-1984 (r2003) standard.
- ² Program Power is defined as 3 dB greater than the Nominal rating.
- ³ Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
- ⁴ Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- ⁵ Linear Math. Xmax is calculated as (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is the gapdepth.
- ⁶ Frequency response curve is measured on infinite baffle conditions.
- ⁷ Impedance curve is measured in free air conditions at small signals.

FREQUENCY RESPONSE AND IMPEDANCE CURVE ^{6 7}

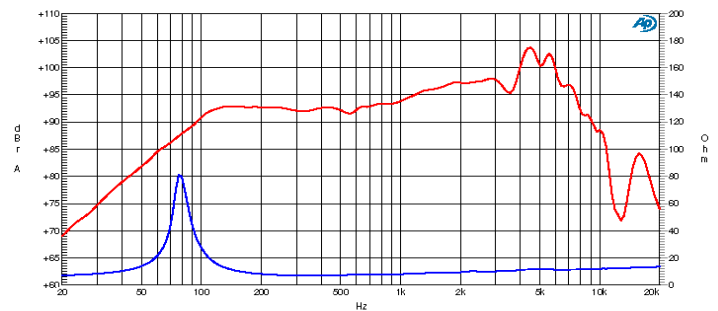

MOUNTING AND SHIPPING INFORMATION

Overall Diameter	165,5 mm - 6,52 in
Baffle Cutout Diameter	142 mm - 5,59 in
Flange and Gasket Thickness	7 mm - 0,28 in
Total Depth	80 mm - 3,15 in
Bolt Circle Diameter	156 mm - 6,14 in
Bolt Holes Quantity and Diameter	4 / 5 mm - 0,2 in
Net Weight	2,4 Kg - 5,29 lb
Shipping Units	6 Pcs