

Specification

Nominal Basket Diameter	6.5", 165mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	150W
Music Program	300W
Resonance	460Hz
Usable Frequency Range***	500Hz-5.4kHz
Sensitivity	97.8
Magnet Weight	38 oz
Gap Height	0.31", 7.92mm
Voice Coil Diameter	1.5", 38.1mm

Thiele & Small Parameters

Resonant Frequency (fs)	460Hz
DC Resistance (Re)	6.3
Coil Inductance (Le)	0.33mH
Mechanical Q (Qms)	3.13
Electromagnetic Q (Qes)	1.24
Total Q (Qts)	0.89
Compliance Equivalent Volume (Vas)	0.4 ltr/0.01 cu. ft.
Peak Diaphragm Displacement Volume (Vd)	2.7cc
Mechanical Compliance of Suspension (Cms)	0.01mm/N
BL Product (BL)	11.1 T-M
Diaphragm Mass inc. Airlod (Mms)	9 grams
Efficiency Bandwidth Product (EBP)	371
Maximum Linear Excursion (Xmax)	0.2mm
Surface Area of Cone (Sd)	133.1cm ²
Maximum Mechanical Limit (Xlim)	0.8mm

Mounting Information

Recommended Enclosure Volume	
Sealed	N/A
Vented	N/A
Overall Diameter	6.59", 167mm/Width across flats: 6", 152mm
Baffle Hole Diameter	5.65", 143.5mm
Front Sealing Gasket	Fitted as Standard
Rear Sealing Gasket	
Mounting Holes Diameter	0.23", 5.7mm
Mounting Holes B.C.D.	6.06", 154mm
Depth	2.77", 70mm
Net Weight	6.7 lbs, 3 kg
Shipping Weight	7.2 lbs, 3.3 kg


Materials of Construction

Coil Construction	Copper
Coil	Polyimide
Magnet Composition	Ferrite
Core Details	Vented And Extended
Basket Materials	Pressed Steel With Truncated Sides
Cone Composition	Paper
Cone Edge Composition	Cloth
Dust Cap Composition	Solid Composition Paper



LA6-CBMR American Standard Series

Recommended for professional audio midrange from 500Hz-3kHz. Basket is closed. Truncated basket for close spacing in line-arrays.

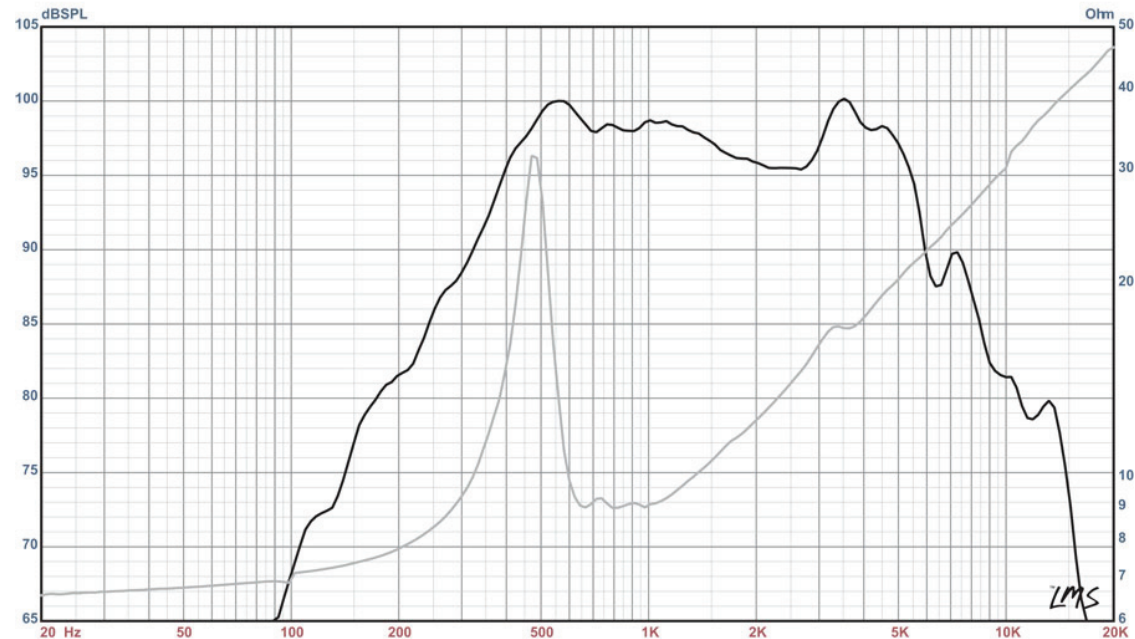

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, nontemperature-controlled environment.

*** The average output across the usable frequency range when applying 1W/1m into the nominal impedance. I.e: 2.83 V/8 ohms, 4 V/16 ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. X 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)



LA6-CBMR American Standard Series

This speaker incorporates the use of a closed back chassis and does not require a tuned enclosure to enhance performance.